


Prysmian Mobra arm solutions

Product code - See Table Below

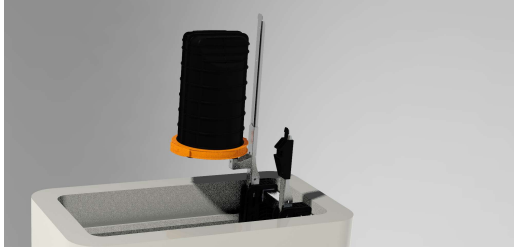

DESIGN & CONSTRUCTION

- Made from Stainless steel
- Durable slim design
- Various lengths available to suit different size pits

Product description

Prysmian's range of MOBRA mounting brackets provide the ideal fixings for many of Prysmian's fibre optic joint enclosures within chambers.

Technical data

- Material: 40% Glass Filled Nylon
Stainless steel
- Packing dimension: - 693MM x 182MM x 76MM

Item	Prysmian Part No.	Description	Image
LMJ-COMplete EXTERNAL MOBRA MOUNTING KIT	XJTSC03203	The LMJ-COMplete EXTERNAL MOBRA MOUNTING KIT is fitted to the base of the closure. It is then used to mount the closure in a footway box and allows storage in the horizontal and can be pivoted in to a vertical position. It is suitable for the JUF/4-6 chambers.	
UMJ-CMJ-MMJ HALF SIZE MOBRA MOUNTING KIT	XJTSC03265	The UMJ-CMJ-MMJ HALF SIZE MOBRA MOUNTING KIT is fitted to the clamp of the closure. It is then used to mount the closure in a footway box and allows storage in the horizontal and can be pivoted in to a vertical position. It is suitable for the JUF/2 chambers.	
CBT-HALF SIZE MOBRA MOUNTING KIT	XJTSC03350	The CBT-HALF SIZE MOBRA MOUNTING KIT is fitted to the back plate of the closure. It is then used to mount the closure in a footway box and allows storage in the horizontal and can be pivoted in to a vertical position. It is suitable for the JUF/2 chambers.	
U/C/MMJ - MOBRA ARM KIT - FULL LENGTH	XJTSC02585	U/C/MMJ - MOBRA ARM KIT - FULL LENGTH is fitted to the base of the closure. It is then used to mount the closure in a footway box and allows storage in the horizontal and can be pivoted in to a vertical position. It is suitable for the JUF/4-6 chambers.	

© Prysmian Group 2021, All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed correct at the time of issue. Prysmian Group reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.

Please contact your local sales office listed on www.prysmiangroup.com