


12F MINI CABLE G657A1 BLACK

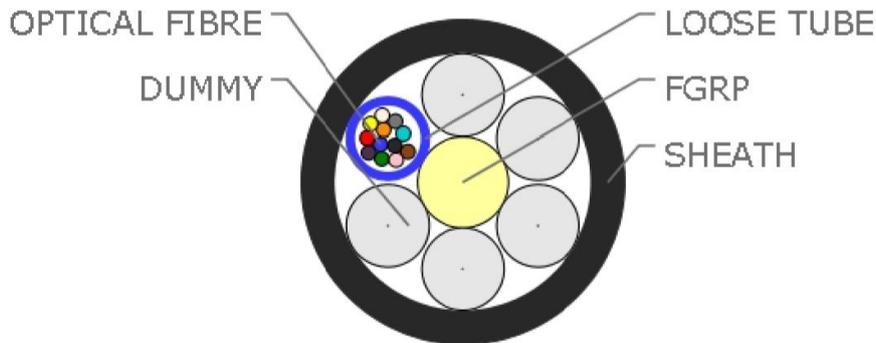

PRODUCT OVERVIEW

Application

This product is designed for installation into microducts by blowing.

Overall

Product Diameter	5.8mm
Product Weight	18.6g/m
Colour	Black
Metal Free	Yes
Minimum Bend Radius <small>(Note 4)</small>	13D
Maximum Installation Tension	450N @ 0.4% Fibre Strain
Maximum Operation Tension	55N @ 0% Fibre Strain
Fibre Specification	ITU-T G.657.A1, MHT2050

Fibre Details

12x SM G657A1
blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, aqua

Loose Tubes

1x 1.45/1.15mm, PBT gel filled, 12x SM G657A1
blue

Other Elements

5x Filler(s)
Natural, Natural, Natural, Natural, Natural

Construction

Outer Sheath	HDPE, black, 0.6mm thick
Strength Member	1.6mm FGRP
Cable Core	SZ stranding

Print Marking

EMTELLE FIBREFLOW - Year - 12f - G657A1 - PRODUCT CODE - Wxxxxxxx - Metre Mark

Data Sheet 90692

Packaging

Product Length

6000m

Pack Type

G drum wood 1200x600x600mm

Note 1: Diameters and thicknesses are measured to nearest 0.1mm.

Note 2: All dimensions and weight are 'nominal'.

Note 3: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.

Note 4: 'D' is the appropriate product diameter for the bending direction.