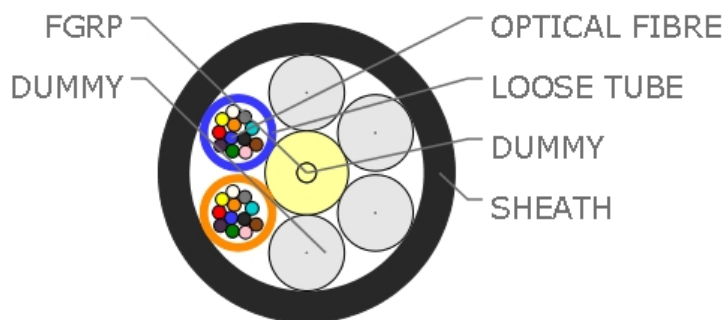


24F MINI CABLE G657A1 BLACK

PRODUCT OVERVIEW
Application

This product is designed for installation into microducts by blowing.

Overall

Product Diameter	5.8mm
Product Weight	24.5g/m
Colour	Black
Metal Free	Yes
Minimum Bend Radius (Note 4)	19D
Maximum Installation Tension	475N @ 0.4% Fibre Strain
Maximum Operation Tension	55N @ 0% Fibre Strain
Fibre Specification	ITU-T G.657.A1, MHT2050

Fibre Details

24x SM G657A1
blue, orange, green, brown, grey, white, red, black, yellow,
violet, pink, aqua

Loose Tubes

2x 1.45/1.15mm, PBT gel filled, 12x SM G657A1
blue, orange

Other Elements

4x Filler(s)
Natural, Natural, Natural, Natural

Construction

Outer Sheath	HDPE, black, 0.6mm thick
Strength Member	1.6mm FGRP
Cable Core	SZ stranding

Data Sheet 90693

Print Marking

EMTELLE FIBREFLOW - Year - 24f - G657A1 - PRODUCT CODE - Wxxxxxxxx - Metre Mark

Packaging

Product Length	6000m
Pack Type	G drum wood 1200x600x600mm

Note 1: Diameters and thicknesses are measured to nearest 0.1mm.

Note 2: All dimensions and weight are 'nominal'.

Note 3: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.

Note 4: 'D' is the appropriate product diameter for the bending direction.