



Mills Limited
Unit 2,
Zodiac Business Park,
High Road,
Cowley
Uxbridge
UB8 2GU


Contact us on:
Tel: 020 8833 2626
Fax: 020 8833 2600
Email: sales@millsltd.com

Company No. 00282704
VAT No. 227082574

7 / 3.7mm Universal Drop Tube Orange 2x Black Stripe 1000m

[Product Images](#)

Product Code: 65026/1KM

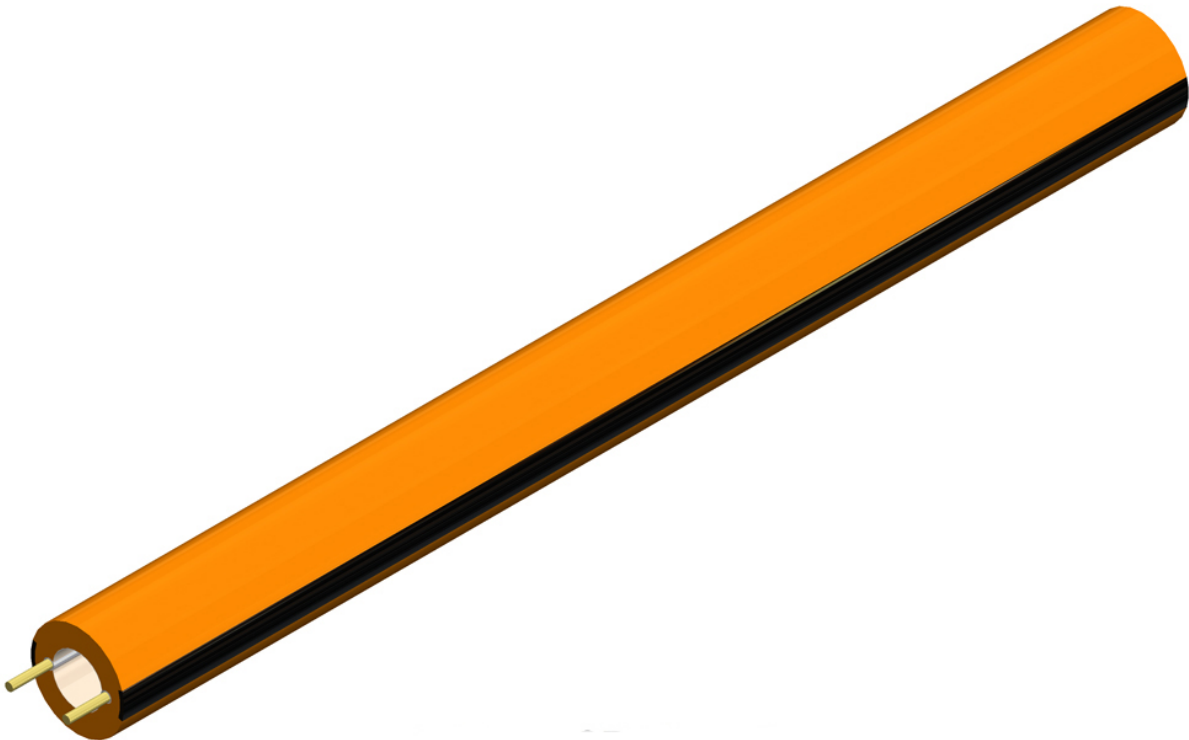

Short Description

Direct burial microduct, 7/3.7mm Universal Drop Tube Orange 2x Black Stripe 1000m

Overview

Product Diameter 7mm

Product Length 1000m (1 kilometre)

Product Weight 26.1g/m

Colour Orange, 2x black stripe(s)

Metal Free Yes

Minimum Bend Radius (Note 4) 22D

Maximum Tensile Load 425N

Construction

Outer Sheath MDPE, orange, 2x black stripe(s), 1.57mm thick

Inner Sheath Liner, white, 0.08mm thick

Strength Member 0.8mm (0.6mm FGRP with adhesive coating)

Additional Information

If Exposed to UV, protection is 2 years Northern European.

Note 1: Diameters and thicknesses are measured to nearest 0.1mm.

Note 2: All dimensions and weight are 'nominal'.

Note 3: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.

Note 4: 'D' is the appropriate product diameter for the bending direction.

Additional carriage charges may apply. Please contact sales for further information

Description

Direct burial microduct, 7/3.7mm Universal Drop Tube Orange 2x Black Stripe 1000m

Overview

Product Diameter 7mm

Product Length 1000m (1 kilometre)

Product Weight 26.1g/m

Colour Orange, 2x black stripe(s)

Metal Free Yes

Minimum Bend Radius (Note 4) 22D

Maximum Tensile Load 425N

Construction

Outer Sheath MDPE, orange, 2x black stripe(s), 1.57mm thick

Inner Sheath Liner, white, 0.08mm thick

Strength Member 0.8mm (0.6mm FGRP with adhesive coating)

Additional Information

If Exposed to UV, protection is 2 years Northern European.

Note 1: Diameters and thicknesses are measured to nearest 0.1mm.

Note 2: All dimensions and weight are 'nominal'.

Note 3: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.

Note 4: 'D' is the appropriate product diameter for the bending direction.

Additional carriage charges may apply. Please contact sales for further information