

Tempo DFE101 Drop Fibre Enclosure Kit 2 Port Stub



Product Images

Product Code: C00-4637



COMPONENT PARTS:						SPECIFICATIONS:	
PART	DESCRIPTION	PRODUCT	QUANTITY (ENCLOSURE)	QUANTITY (DROP FIBRE)	ITEM NO.	UNIT	REMARKS
Cover Plate	400x400x10mm	[Image]	1	1	0001	EA	Black RAL 9005, 100% UV Stable, 100% Flame Retardant
Cover Bracket	400x400x10mm	[Image]	1	1	0002	EA	Black RAL 9005, 100% UV Stable, 100% Flame Retardant
Rubber Gasket	400x400x10mm	[Image]	1	1	0003	EA	Black, 100% UV Stable, 100% Flame Retardant
Rubber Gasket	100x100x10mm	[Image]	1	1	0004	EA	Black, 100% UV Stable, 100% Flame Retardant
Rubber Gasket	100x100x10mm	[Image]	1	1	0005	EA	Black, 100% UV Stable, 100% Flame Retardant
Rubber Gasket	100x100x10mm	[Image]	1	1	0006	EA	Black, 100% UV Stable, 100% Flame Retardant
Rubber Gasket	100x100x10mm	[Image]	1	1	0007	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0008	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0009	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0010	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0011	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0012	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0013	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0014	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0015	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0016	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0017	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0018	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0019	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0020	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0021	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0022	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0023	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0024	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0025	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0026	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0027	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0028	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0029	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0030	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0031	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0032	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0033	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0034	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0035	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0036	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0037	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0038	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0039	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0040	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0041	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0042	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0043	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0044	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0045	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0046	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0047	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0048	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0049	EA	Black, 100% UV Stable, 100% Flame Retardant
Locking Screws	100x100x10mm	[Image]	1	1	0050	EA	Black, 100% UV Stable, 100% Flame Retardant



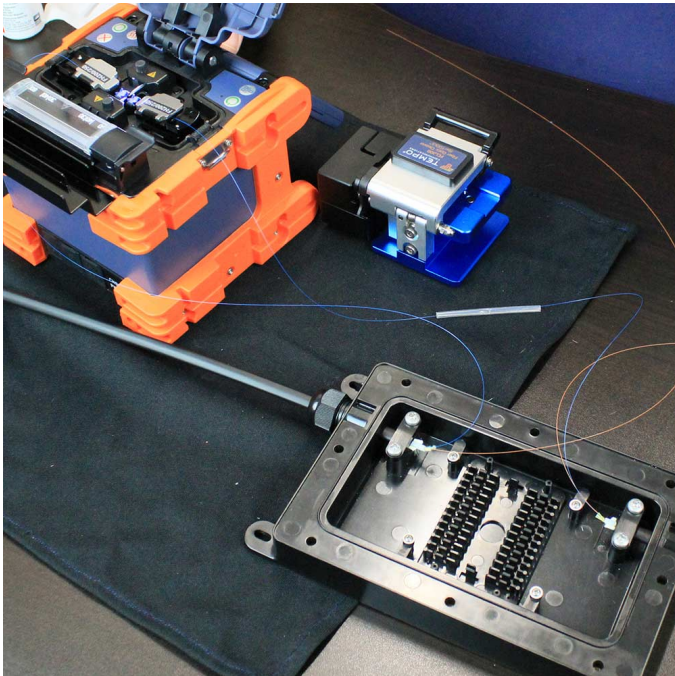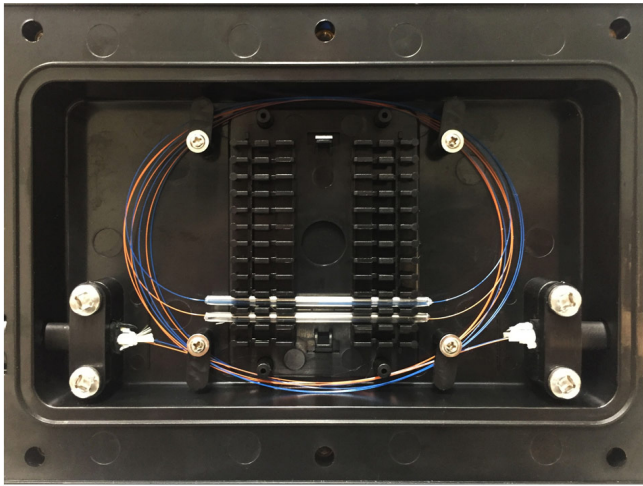

Short Description

The Drop Fibre Enclosure Kit can be used as a demarcation point to install fibre optic cable splices and as a repair product to reconnect damaged or severed drop fibre cables.

Common fibre sizes of 8.1mm, 5.4mm and 5.1mm rectangular cables and 3.0mm and 5.1mm round cables are accommodated with the supplied sealing gaskets.

Both fusion splices (total of 12) and two mechanical splices are securely positioned within the IP68 rated enclosure.

The enclosure can be permanently buried or mounted on the side of a building.

Two DFE100 enclosures are typically used to repair a drop fibre as there is not enough slack cable to

reconnect the fibre.

Features

- IP68 rated for buried applications and element protection
- Accommodates up to 14 fibres
- Individual gaskets for 8.1, 5.4 and 5.1 mm and 3.0mm, 5.1mm round cable
- Fast assembly with common tools

Specifications

IP Rating IP68*

Size 8.85 x 4.72 x 1.34" (225 x 120 x 34mm)

Weight 0.66lb (0.3kg)

Cable Sizes 8.1mm rectangular, 5.4mm & 5.1mm rectangular and 3.0mm and 5.1mm round

Fusion Splice Locations Twelve (60mm)

Mechanical Splice Locations Two

Color Black

Material ABS with Polycarbonate (UV resistant)

Operating Temperature -40 to +80C

Storage Temperature -40 to +80C

See datasheet for further details

Description

The Drop Fibre Enclosure Kit can be used as a demarcation point to install fibre optic cable splices and as a repair product to reconnect damaged or severed drop fibre cables.

Common fibre sizes of 8.1mm, 5.4mm and 5.1mm rectangular cables and 3.0mm and 5.1mm round cables are accommodated with the supplied sealing gaskets.

Both fusion splices (total of 12) and two mechanical splices are securely positioned within the IP68 rated enclosure.

The enclosure can be permanently buried or mounted on the side of a building.

Two DFE100 enclosures are typically used to repair a drop fibre as there is not enough slack cable to

reconnect the fibre.

Features

- IP68 rated for buried applications and element protection
- Accommodates up to 14 fibres
- Individual gaskets for 8.1, 5.4 and 5.1 mm and 3.0mm, 5.1mm round cable
- Fast assembly with common tools

Specifications

IP Rating IP68*

Size 8.85 x 4.72 x 1.34" (225 x 120 x 34mm)

Weight 0.66lb (0.3kg)

Cable Sizes 8.1mm rectangular, 5.4mm & 5.1mm rectangular and 3.0mm and 5.1mm round

Fusion Splice Locations Twelve (60mm)

Mechanical Splice Locations Two

Color Black

Material ABS with Polycarbonate (UV resistant)

Operating Temperature -40 to +80C

Storage Temperature -40 to +80C

See datasheet for further details