


# 96F Mini Cable G657A1 Black (6.2mm) 2000m

Product Images

Product Code: 90980/2KM

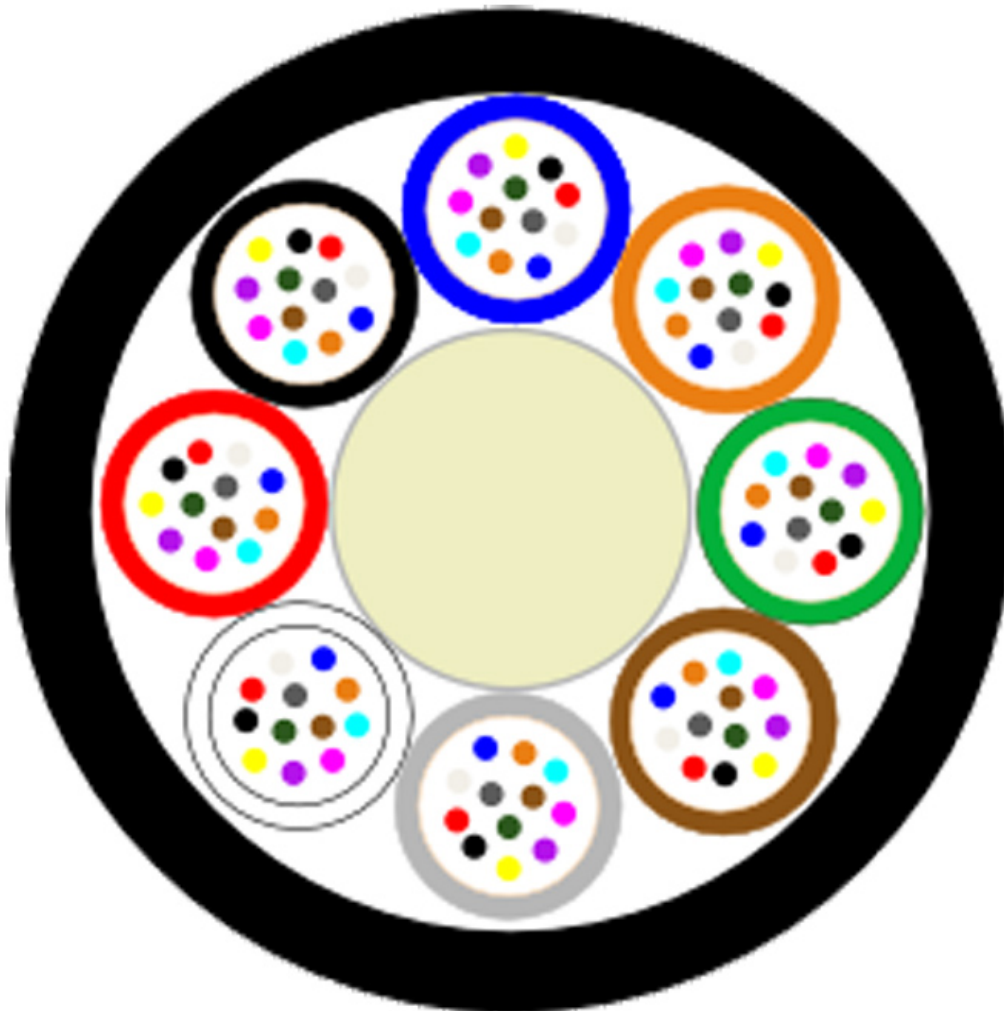

96f

## Short Description

---

Designed for installation into microducts by blowing.

### Overview

Product Diameter 6.5mm

Product Weight 36.8g/m

Colour Black

Metal Free Yes

Minimum Bend Radius (Note 4) 20D

Maximum Installation Tension 1200N @ 0.4% Fibre Strain

Maximum Operation Tension 200N @ 0% Fibre Strain

Product Specification MHT440

Fibre Specification ITU-T G.657.A1, MHT2050

Fibre Details 96x SM G657A1 blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, aqua

Loose Tubes 8x 1.45/1.15mm, PBT gel filled, 12x SM G657A1 black, red, white, grey, brown, green, orange, blue

### Construction

Outer Sheath HDPE, black, 0.5mm thick

Strength Member 2.6mm FGRP

Cable Core SZ stranding

### Print Marking

Emtelle Fibreflow, Year, 96F G657A1, [Product Code], Batch No, metre mark

Length 2000 metres (2 kilometres)

Note 1: Diameters and thicknesses are measured to nearest 0.1mm.

Note 2: All dimensions and weight are 'nominal'.

Note 3: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.

Note 4: 'D' is the appropriate product diameter for the bending direction.

## Description

---

Designed for installation into microducts by blowing.

### Overview

Product Diameter 6.5mm

Product Weight 36.8g/m

Colour Black

<https://www.millsLtd.com/default/96f-mini-cable-g657a1-black-6-2mm-2000m.html>

26/04/2024

Metal Free Yes

Minimum Bend Radius (Note 4) 20D

Maximum Installation Tension 1200N @ 0.4% Fibre Strain

Maximum Operation Tension 200N @ 0% Fibre Strain

Product Specification MHT440

Fibre Specification ITU-T G.657.A1, MHT2050

Fibre Details 96x SM G657A1 blue, orange, green, brown, grey, white, red, black, yellow, violet, pink, aqua

Loose Tubes 8x 1.45/1.15mm, PBT gel filled, 12x SM G657A1 black, red, white, grey, brown, green, orange, blue

Construction

Outer Sheath HDPE, black, 0.5mm thick

Strength Member 2.6mm FGRP

Cable Core SZ stranding

Print Marking

Emtelle Fibreflow, Year, 96F G657A1, [Product Code], Batch No, metre mark

Length 2000 metres (2 kilometres)

Note 1: Diameters and thicknesses are measured to nearest 0.1mm.

Note 2: All dimensions and weight are 'nominal'.

Note 3: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.

Note 4: 'D' is the appropriate product diameter for the bending direction.