


# Prysmian PBI-8SC Riser Box

Product Images

Product Code: XCPSC03170

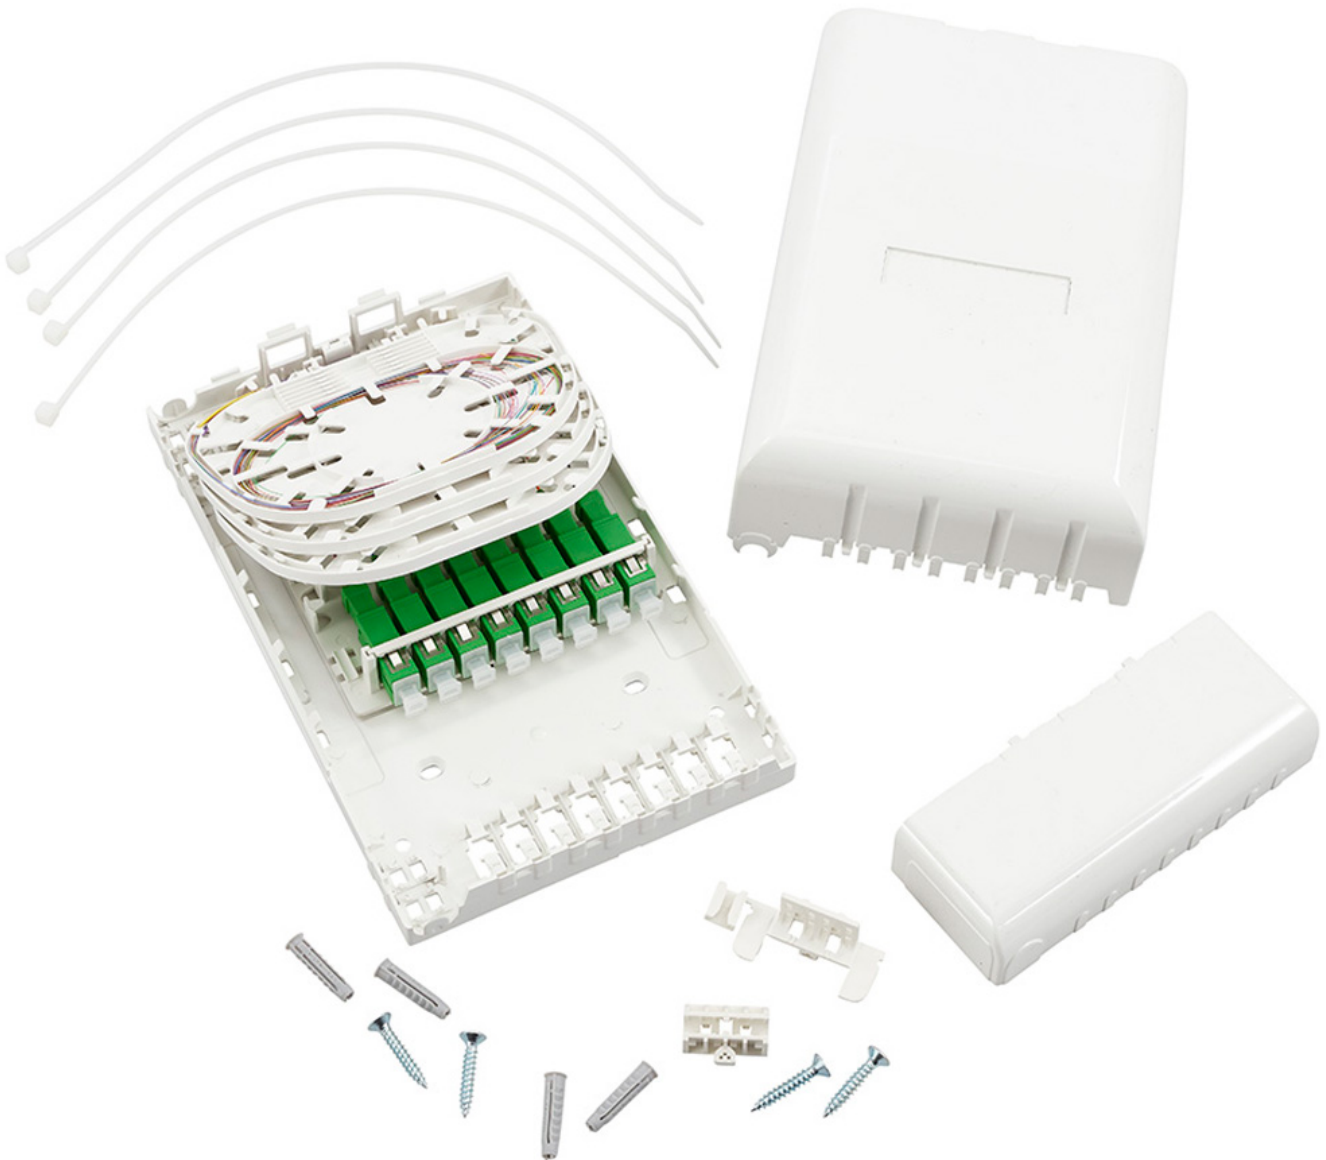

## Short Description

---

The PBI-8SC is a riser box designed for use within apartment blocks and mid/high rise office blocks. The unit houses three splice trays and up to 8 SC type pigtails and adapters. Each splice tray is able to accommodate 12 fibre splices.

An in-line cable entry port enables the box to be installed onto an in-line riser cable and up to 24 drop ports are available for drop cables of up to 5mm in diameter.

Supplied with 3 trays, 8 SC-APC pigtails and adaptors

### Features

- Allows splicing from in line or butt cables to customer drop cables.
- Suitable for two butt or one inline cable of up to 15mm in diameter.
- In line cables enter the unit on the left hand side.
- 24 drop cables (OD 5 mm) can be spliced. Drop cables exit the unit from the bottom face.
- The drop cable entries are suitable for cables or tubes from 2.5 to 5 mm in diameter.
- Up to 8 pre-connectorized drop cables can be accommodated using SC type connectors.
- Up to 12 fusion splices can be accommodated into each of the splice trays.
- Can accommodate optical splitters. Contact Prysmian for further details.
- Cable management ensures a 20mm minimum bend radius.
- Easily installed and fitted to the wall or inside a riser.
- Suitable for internal use only and manufactured from UL94-V0 rated material.
- Input and output cables are retained using cable ties.

## Description

---

The PBI-8SC is a riser box designed for use within apartment blocks and mid/high rise office blocks. The unit houses three splice trays and up to 8 SC type pigtails and adapters. Each splice tray is able to accommodate 12 fibre splices.

An in-line cable entry port enables the box to be installed onto an in-line riser cable and up to 24 drop ports are available for drop cables of up to 5mm in diameter.

Supplied with 3 trays, 8 SC-APC pigtails and adaptors

### Features

- Allows splicing from in line or butt cables to customer drop cables.
- Suitable for two butt or one inline cable of up to 15mm in diameter.

- In line cables enter the unit on the left hand side.
- 24 drop cables (OD 5 mm) can be spliced. Drop cables exit the unit from the bottom face.
- The drop cable entries are suitable for cables or tubes from 2.5 to 5 mm in diameter.
- Up to 8 pre-connectorized drop cables can be accommodated using SC type connectors.
- Up to 12 fusion splices can be accommodated into each of the splice trays.
- Can accommodate optical splitters. Contact Prysmian for further details.
- Cable management ensures a 20mm minimum bend radius.
- Easily installed and fitted to the wall or inside a riser.
- Suitable for internal use only and manufactured from UL94-V0 rated material.
- Input and output cables are retained using cable ties.