

---


# Linian SuperClip Galvanised

## 23-25mm Pk25

Product Images

Product Code: R02-1422

---

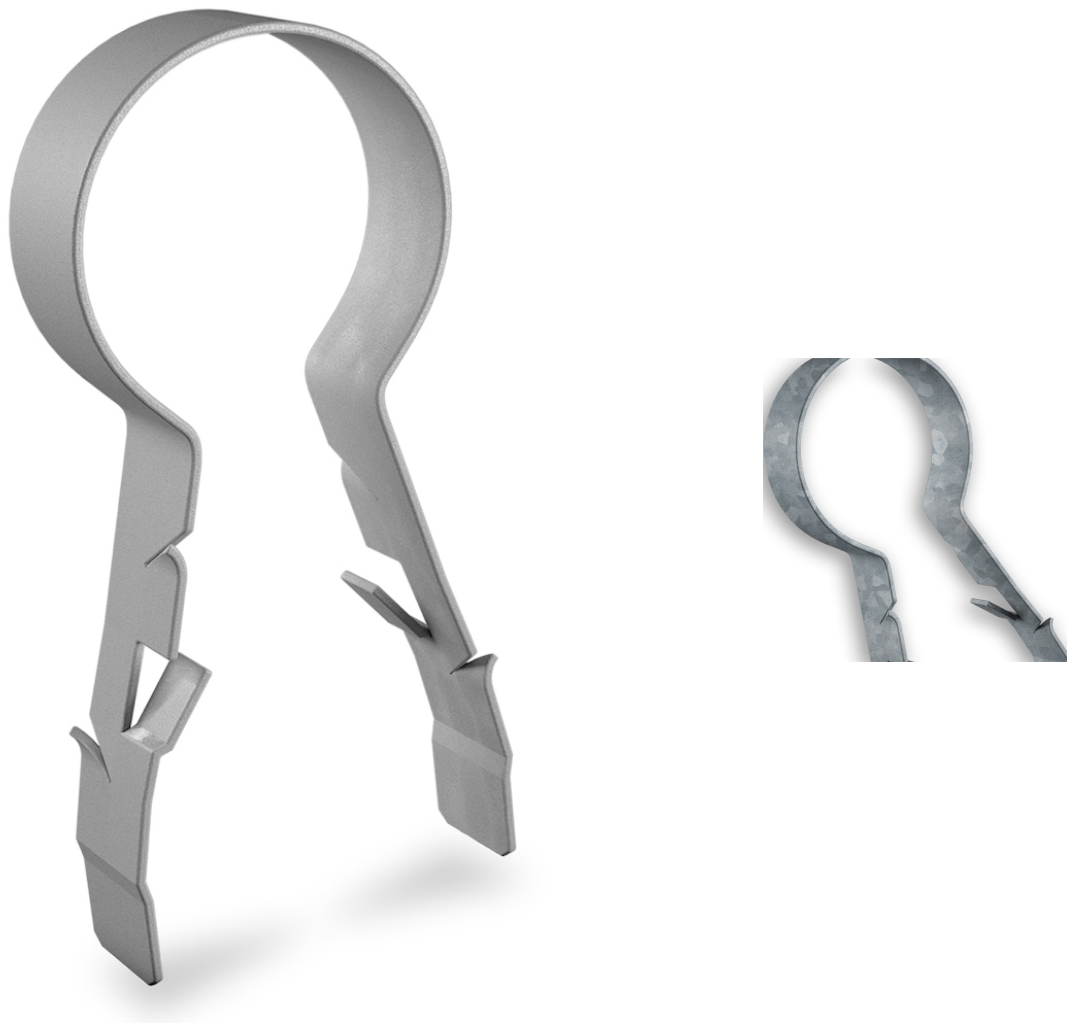

### Short Description

---

Linian SuperClips™ are designed specifically for conduit, armoured (SWA) and grouped cables. The cable

clips are suitable for all substrates and provide a robust fixing designed to enable significant rotational stress and to support an impressive tensile load of 44kg.

With SuperClips, the installer can anchor SWA safely and form a bend in the cable without having to remove the clip to do so. SuperClips provide a neat, easy and versatile substitute for plastic cleats and metal saddle clips and eradicate the need for screws, plugs and plastic. SuperClips™ are designed to provide a lasting fix, however, if a design change is required, the clips can be simply removed with a set of pincers.

Available in Colours: Red/Black/White/Cream/Purple/Yellow/Orange/**Galvanised**/Copper  
To suit cable diameter: 12-14mm/15-18mm/18-20mm/20-22mm/**23-25mm**

Recommended spacing: 300mm

Hole Diameter\* 10mm

Hole depth: 40mm

Supports a max tensile load of 44kg

18th Edition Compliant

Fire-resistant >1000°C

\*Varies for best fixing according to the substrate

Supplied in a pack of 25

## Description

---

Linian SuperClips™ are designed specifically for conduit, armoured (SWA) and grouped cables. The cable clips are suitable for all substrates and provide a robust fixing designed to enable significant rotational stress and to support an impressive tensile load of 44kg.

With SuperClips, the installer can anchor SWA safely and form a bend in the cable without having to remove the clip to do so. SuperClips provide a neat, easy and versatile substitute for plastic cleats and metal saddle clips and eradicate the need for screws, plugs and plastic. SuperClips™ are designed to provide a lasting fix, however, if a design change is required, the clips can be simply removed with a set of pincers.

Available in Colours: Red/Black/White/Cream/Purple/Yellow/Orange/**Galvanised**/Copper  
To suit cable diameter: 12-14mm/15-18mm/18-20mm/20-22mm/**23-25mm**

Recommended spacing: 300mm

Hole Diameter\* 10mm

Hole depth: 40mm

Supports a max tensile load of 44kg

18th Edition Compliant

Fire-resistant >1000°C

\*Varies for best fixing according to the substrate

Supplied in a pack of 25