


Regin Premier Gas Leak Detection Spray 300ml

Product Images

Product Code: R99-0503

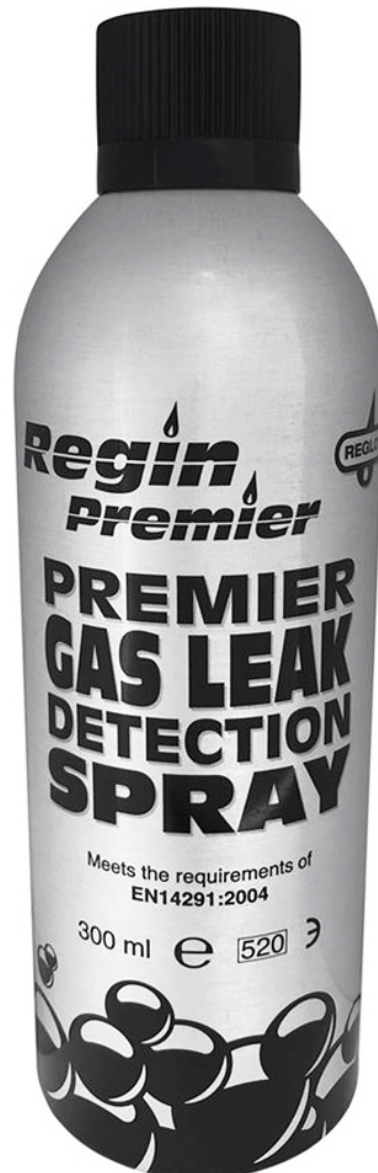

Short Description

Regin REGL01 Premier Leak Detection Spray is water based and developed without the use of harmful solvents, oils or silicones, to allow safe and easy detection of all gas and air leaks.

Helps locate all leaks even those under low pressure. Ideal for maintenance and safety checks on: pipework, joints, valves, couplings, air lines and many more.

The product remains stable and will not break down in use. Completely odourless and non-flammable. Regin premier Gas Leak Detection Spray is suitable for use on compressed air and most industrial gases.

Key points:

Meets the requirements of MIL-PRF-25567E* of oxygen compatibility. Testing of oxygen systems must be done carefully, and product residues should not be allowed to build up. Can be used with all types of gases: natural gas - oxygen - compressed air, on all types of refrigerants, propane - LPG, butane - nitrogen and acetylene - carbon dioxide.

- Meets the requirements of EN14291:2004
- Safe detection of positive leaks.
- Non-staining, non-corrosive, stable and safe to use.
- Suitable for use with most gases.
- Compatible with most metals and plastics.
- Specially equipped with a 360° valve to enable use at all angles, even upside down.
- Water based. Clean and safe in use.
- Non-Flammable.
- Fast and easy application.

Description

Regin REGL01 Premier Leak Detection Spray is water based and developed without the use of harmful solvents, oils or silicones, to allow safe and easy detection of all gas and air leaks.

Helps locate all leaks even those under low pressure. Ideal for maintenance and safety checks on: pipework, joints, valves, couplings, air lines and many more.

The product remains stable and will not break down in use. Completely odourless and non-flammable. Regin premier Gas Leak Detection Spray is suitable for use on compressed air and most industrial gases.

Key points:

Meets the requirements of MIL-PRF-25567E* of oxygen compatibility. Testing of oxygen systems must be done carefully, and product residues should not be allowed to build up. Can be used with all types of gases: natural gas - oxygen - compressed air, on all types of refrigerants, propane - LPG, butane - nitrogen and acetylene - carbon dioxide.

Meets the requirements of EN14291:2004

Safe detection of positive leaks.

Non-staining, non-corrosive, stable and safe to use.

Suitable for use with most gases.

Compatible with most metals and plastics.

Specially equipped with a 360° valve to enable use at all angles, even upside down.

Water based. Clean and safe in use.

Non-Flammable.

Fast and easy application.