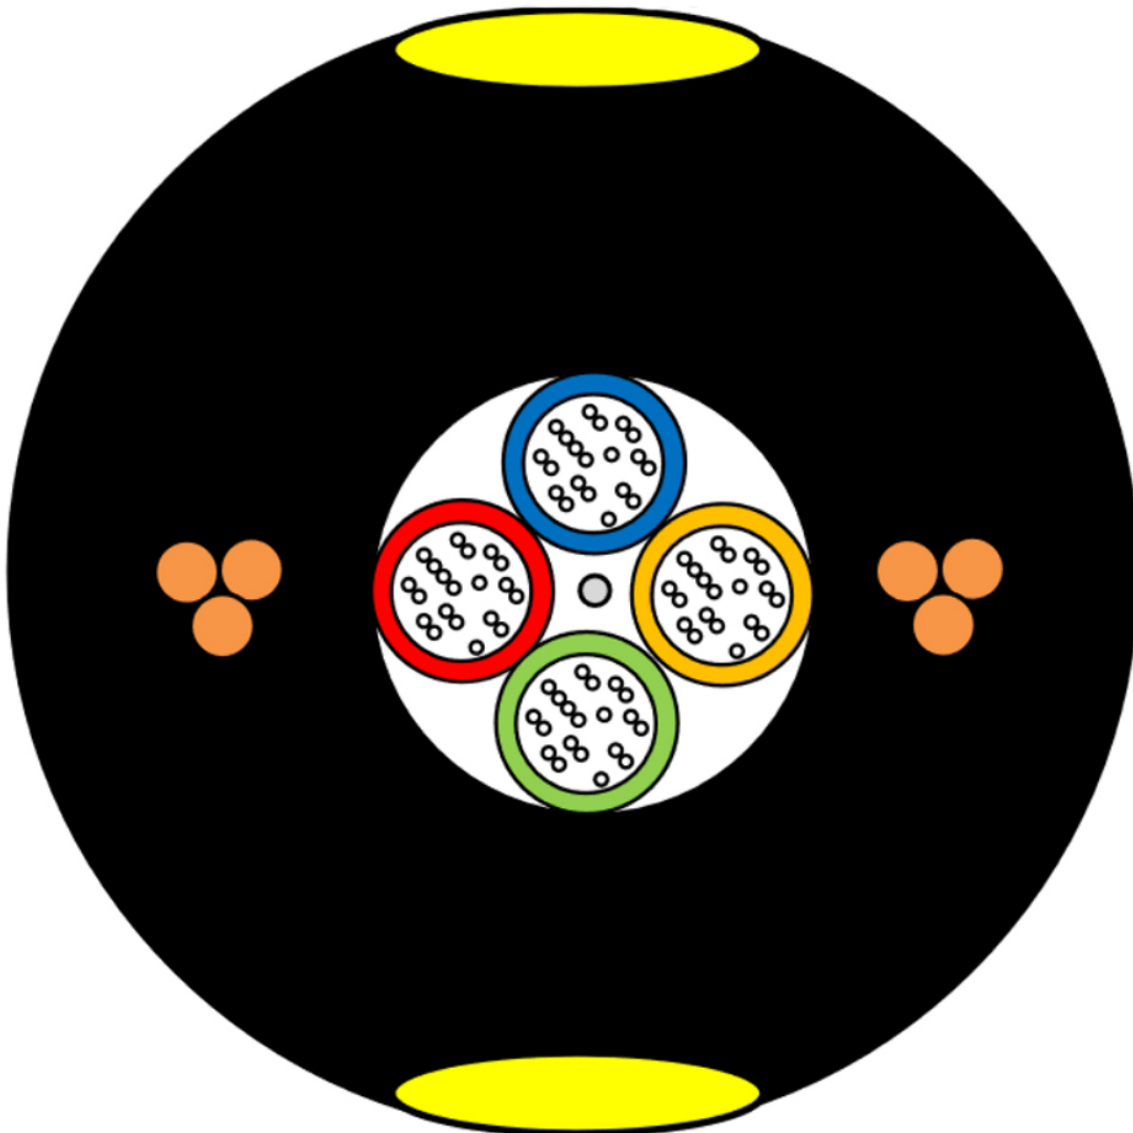

Prysmian 96F Optical Aerial Drop Cable (ULW) 2KM Drum

Product Images

Product Code: 60098854/2KM



Short Description

This multi-unit optical drop cable is designed for aerial and/or duct applications and is suitable for use under 11kV power cables.

Optical fibre: 200µm Singlemode G.657.A2.

Layout: 4 x 24 single-mode optical fibres in gel filled unit.

Strength member: 3 x 0.32mm brass plated steel wires.

Longitudinal Water Tightness: Water swellable elements (core only).

Outer Sheath: UV resistant HDPE.

Stripes: Indicate planes for easy sheath removal.

Unit Diameter – Ø 1.4mm

Sheath Thickness 1.9mm

Cable Diameter – Ø 7.1mm

Cable Weight 45kg / km

MIT (Maximum Installation Tension) N 150

MAT (Maximum Allowable Tension) N 1200

Breaking Load N 1350 - 2000

Minimum Setting Diameter 140mm

Please see datasheet for full specifications

Description

This multi-unit optical drop cable is designed for aerial and/or duct applications and is suitable for use under 11kV power cables.

Optical fibre: 200µm Singlemode G.657.A2.

Layout: 4 x 24 single-mode optical fibres in gel filled unit.

Strength member: 3 x 0.32mm brass plated steel wires.

Longitudinal Water Tightness: Water swellable elements (core only).

Outer Sheath: UV resistant HDPE.

Stripes: Indicate planes for easy sheath removal.

Unit Diameter – Ø 1.4mm

Sheath Thickness 1.9mm

2

Cable Diameter – Ø 7.1mm

Cable Weight 45kg / km

MIT (Maximum Installation Tension) N 150

MAT (Maximum Allowable Tension) N 1200

Breaking Load N 1350 - 2000

Minimum Setting Diameter 140mm

Please see datasheet for full specifications