


HellermannTyton Cable Tie 445 x 4.6mm UV-Resistant Black Pk100

Product Images

Product Code: R02-1974

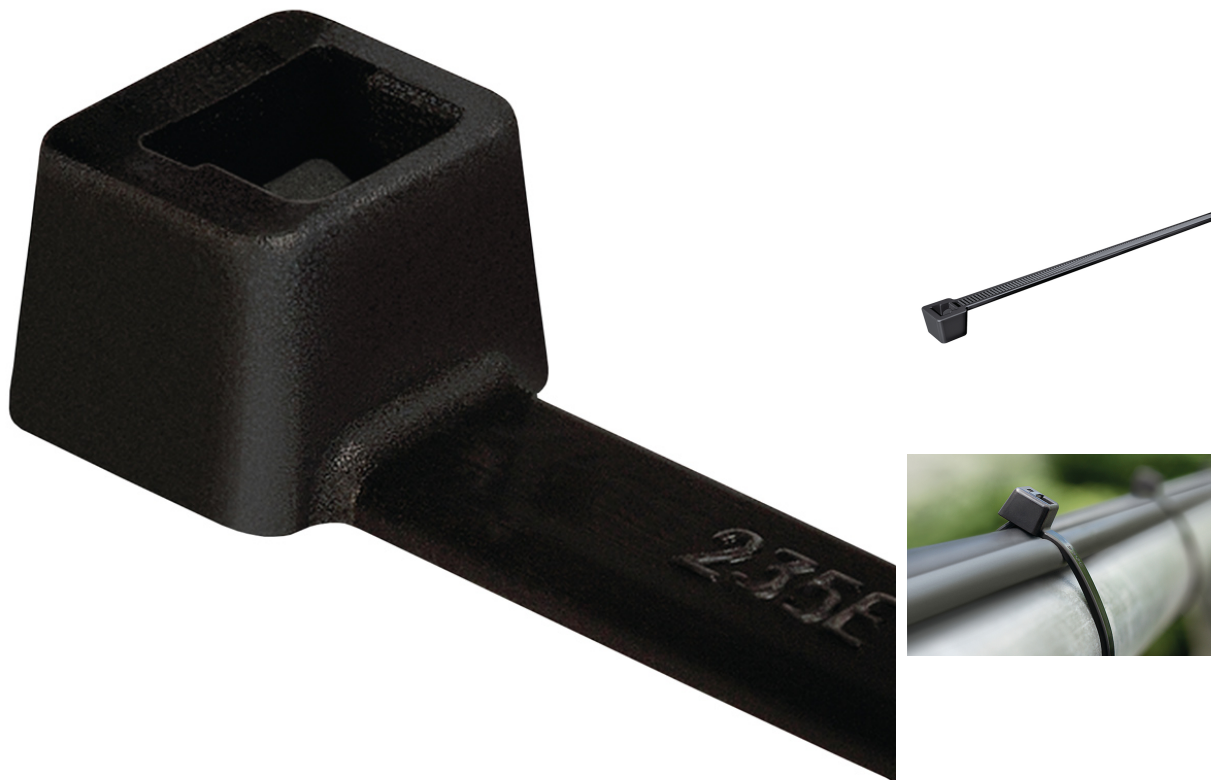

Short Description

These inside serrated cable ties are made of UV resistant Polyamide 6.6 (PA66W) and thus suitable for

outdoor applications. UV stabilised cable ties resist UV radiation for a considerably longer period compared to standard PA66 cable ties.

They can easily be used for bundling and securing cables, pipes and hoses especially in outdoor areas.

Features

- UV resistant black cable tie available in a wide range of sizes
- Made from 100 % high quality plastic, allows for good recycling
- Inside serration for a strong hold onto bundles
- Easy application either manually or with a processing tool
- Simple to insert due to bent tail
- High tensile strength with very low insertion force
- Only high quality plastic is used meeting recycling targets
- Inside serrated cable ties for a strong hold onto bundles
- Ergonomic bent tail offers quick and simple installation
- Easy application either manually or with an application tool

Material Polyamide 6.6, UV-resistant (PA66W)

ELV compliant Dir. Art. 4 (2) YES

Flammability UL 94 V2

Halogenfree Yes

Operating Temperature - °C -40 °C to +85 °C, (+105 °C, 500 h)

Length 445mm

Width 4.6mm

Colour Black

Pack size 100

HellermannTyton Art.-No. 111-06000 | T50LL-PA66W-BK

Description

These inside serrated cable ties are made of UV resistant Polyamide 6.6 (PA66W) and thus suitable for outdoor applications. UV stabilised cable ties resist UV radiation for a considerably longer period compared to standard PA66 cable ties.

They can easily be used for bundling and securing cables, pipes and hoses especially in outdoor areas.

Features

- UV resistant black cable tie available in a wide range of sizes
- Made from 100 % high quality plastic, allows for good recycling

- Inside serration for a strong hold onto bundles
- Easy application either manually or with a processing tool
- Simple to insert due to bent tail
- High tensile strength with very low insertion force
- Only high quality plastic is used meeting recycling targets
- Inside serrated cable ties for a strong hold onto bundles
- Ergonomic bent tail offers quick and simple installation
- Easy application either manually or with an application tool

Material Polyamide 6.6, UV-resistant (PA66W)

ELV compliant Dir. Art. 4 (2) YES

Flammability UL 94 V2

Halogenfree Yes

Operating Temperature - °C -40 °C to +85 °C, (+105 °C, 500 h)

Length 445mm

Width 4.6mm

Colour Black

Pack size 100

HellermannTyton Art.-No. 111-06000 | T50LL-PA66W-BK