



# HellermannTyton T50ROSEC23 Edge Fastening 3 to 6mm - Pack of 500

## Product Images

Product Code: R02-1965

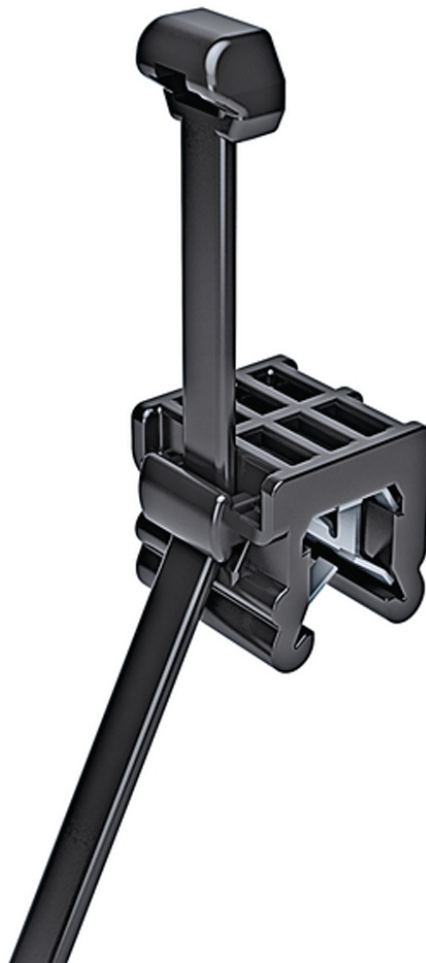

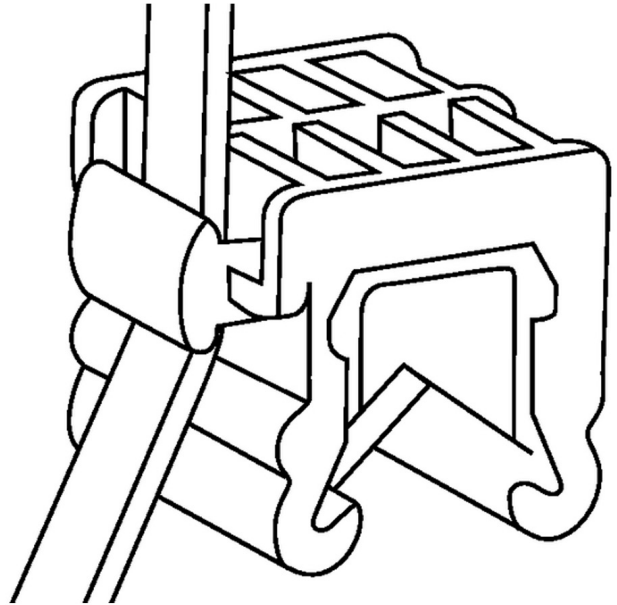

EdgeClip-Series, 1.0 - 3.0 mm

TYPE	Drawing	Panel Thickness	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Tools	Article-No.
T50ROSEC12E R02-1962		1.0 - 3.0	4.6	160.0	35.0	180	PA66W	Black (BK)	2-8;10	126-00374
T50ROSEC13E R02-1963		1.0 - 3.0	4.6	160.0	35.0	180	PA66W	Black (BK)	2-8;10	126-00373
T50ROSEC34E R02-1964		1.0 - 3.0	4.6	155.0	35.0	180	PA66W	Black (BK)	2-8;10	126-00375

All dimensions in mm. Subject to technical changes.

EdgeClip-Series, 1.0 - 3.0 mm, top fixing

TYPE	Drawing	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Tools	Article-No.
T50ROSEC4A R02-1969		4.6	200.0	45.0	225	PA66W	Black (BK)	2-8;10	156-00570
T50ROSEC4B R02-1966		4.6	200.0	45.0	225	PA66W	Black (BK)	2-8;10	156-01154

All dimensions in mm. Subject to technical changes.

EdgeClip-Series, 1.0 - 3.0 mm, side fixing


TYPE	Drawing	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Tools	Article-No.
T50ROSEC5A R02-1970		4.6	200.0	45.0	225	PA66W	Black (BK)	2-8;10	156-00661
T50ROSEC5B R02-1971		4.6	200.0	45.0	225	PA66W	Black (BK)	2-8;10	156-00698

All dimensions in mm. Subject to technical changes.

EdgeClip-Series, 3.0 - 6.0 mm, side fixing

TYPE	Drawing	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Tools	Article-No.
T50ROSEC23 R02-1965		4.6	200.0	45.0	225	PA66W	Black (BK)	2-8;10	156-00843

All dimensions in mm. Subject to technical changes.



TYPE	Drawing	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Tools	Article-No.
T50ROSEC23		4.6	200.0	45.0	225	PA66W	Black (BK)	2-8;10	156-00843

All dimensions in mm. Subject to technical changes.

## Short Description

These cable tie and EdgeClip assemblies are ideal for use where holes are not acceptable or where due to temperature problems adhesives will fail.

These assemblies are widely used for fixing and bundling cables, pipes and hoses within the automotive industry, harness making, panel building and electrical industry.

These two piece assemblies simply push onto an edge with thicknesses from 3.0 to 6.0mm. The high 'pull off' forces are due to the integrated metal clamp. Different Edge Clip variations are available. One version allows for cables to run parallel to the edge, whilst another allows for installation at 90 degrees to the edge. The clip is simply pushed on by hand and held firmly in place by the integrated metal clamp. No fixing hole is necessary. Combined with the outside serrated (OS) ties, specially designed to protect cables from chafing and wear, the Edge Clip family provides an excellent fastening solution.

Foot Part Polyamide 6.6, UV-resistant (PA66W)

Material Polyamide 6.6, UV-resistant (PA66W)

Pack Size 500pcs.

Variant Outside Serrated

ELV compliant Dir. Art. 4 (2) YES

Flammability UL 94 V2

Hazardous good No

Operating Temperature - °C -40 °C to +85 °C, (+105 °C, 500 h)

Side fixing for edges 3.0 to 6.0mm thickness.

HellermannTyton Art.-No. 156-00843 | T50ROSEC23-PA66W-BK

## Description

---

These cable tie and EdgeClip assemblies are ideal for use where holes are not acceptable or where due to temperature problems adhesives will fail.

These assemblies are widely used for fixing and bundling cables, pipes and hoses within the automotive industry, harness making, panel building and electrical industry.

These two piece assemblies simply push onto an edge with thicknesses from 3.0 to 6.0mm. The high 'pull off' forces are due to the integrated metal clamp. Different Edge Clip variations are available. One version allows for cables to run parallel to the edge, whilst another allows for installation at 90 degrees to the edge. The clip is simply pushed on by hand and held firmly in place by the integrated metal clamp. No fixing hole is necessary. Combined with the outside serrated (OS) ties, specially designed to protect cables from chafing and wear, the Edge Clip family provides an excellent fastening solution.

Foot Part Polyamide 6.6, UV-resistant (PA66W)

Material Polyamide 6.6, UV-resistant (PA66W)

Pack Size 500pcs.

Variant Outside Serrated

ELV compliant Dir. Art. 4 (2) YES

Flammability UL 94 V2

Hazardous good No

Operating Temperature - °C -40 °C to +85 °C, (+105 °C, 500 h)

Side fixing for edges 3.0 to 6.0mm thickness.

