



# HellermannTyton Solar C Clip UV-Resistant Black Pk100

Product Images

Product Code: R02-1954



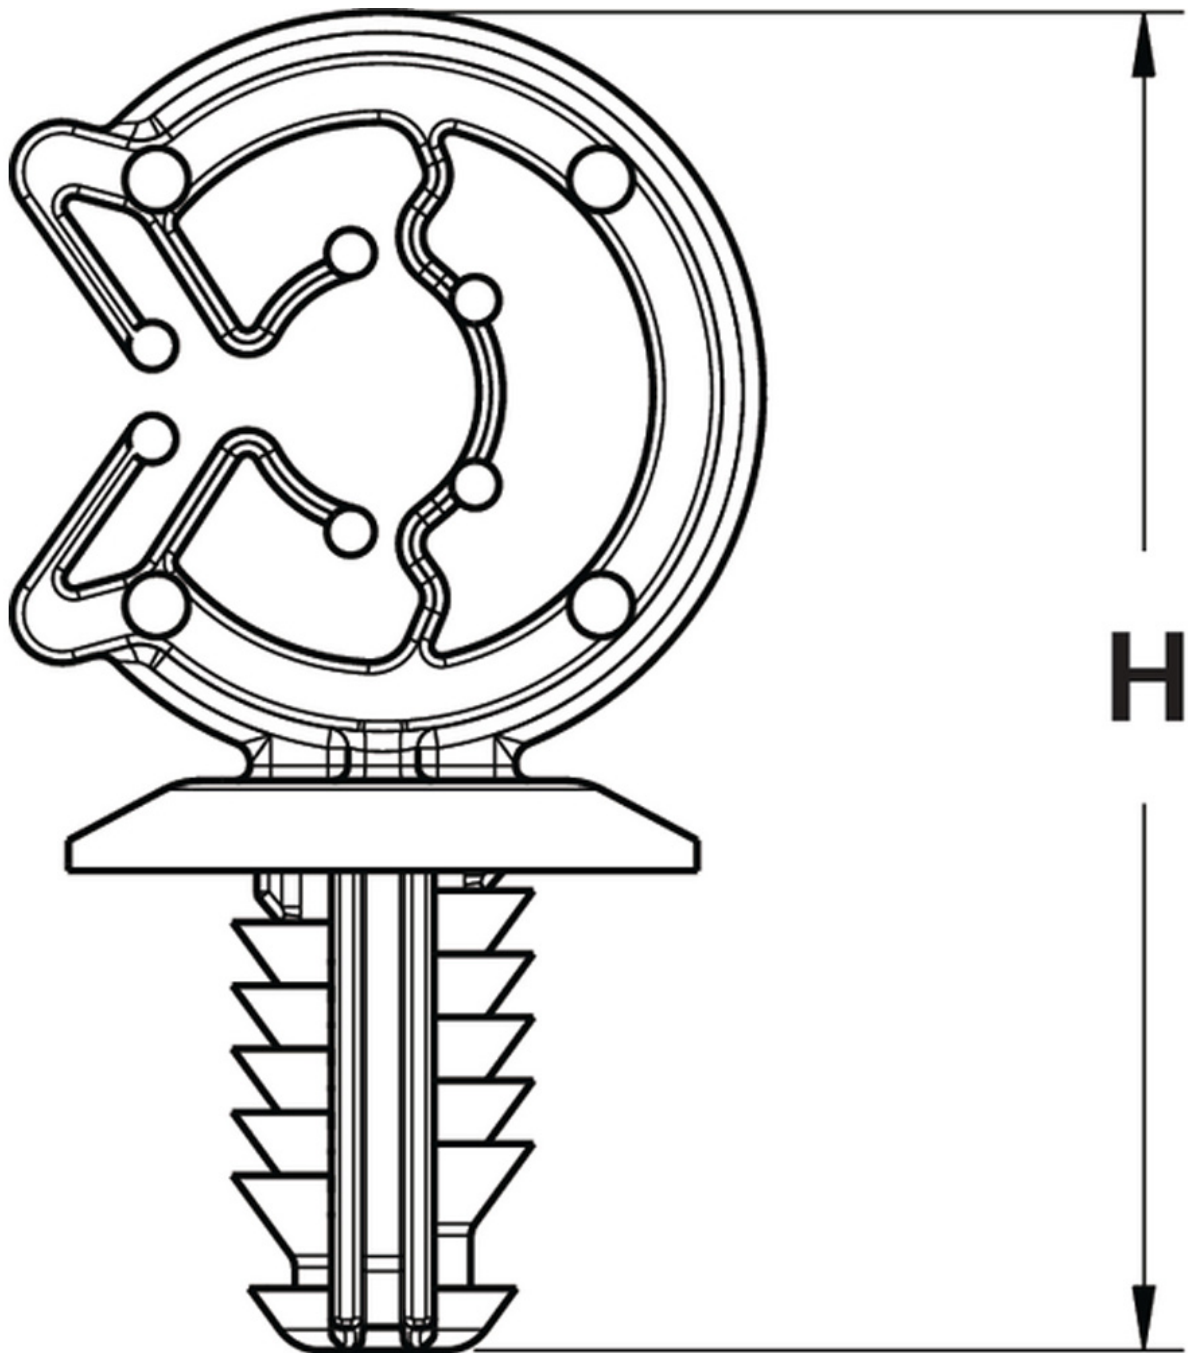

## Short Description

---

The C Clip with fir tree mount is ideal for panels with pre-drilled holes. Easy installation by hand eliminates the need for any tools.

Once installed, the cable simply snaps into the clip. The cable can be removed and reinstalled without removing the clip.

Made from PA66HIRHSUV material, the clip offers increased flexibility along with heat resistance and UV stability.

### Specifications

CE Certification No

2

<https://www.millsLtd.com/default/hellermannyton-solar-c-clip-uv-resistant-black-pk100.html>  
26/04/2024

ELV compliant Dir. Art. 4 (2) YES

Flammability UL 94 HB

Halogenfree Yes

Hazardous good No

Operating Temperature - °C -40 °C to +105 °C, (+105 °C for 500 h)

Attach to Ø 6.0 - 7.6

Bundle Ø max. 7.6mm

Bundle Ø min. 6.0mm

Disc Ø 18.55mm

For Hole Ø 6.6 mm

For Panel Thickness min - max 0.7 - 6.4 mm

Height (H) 33.43mm

Width (W) 18.26mm

Width (W2) 8.0mm

Supplied in a pack of 100.

HellermannTyton Art.-No. 151-00927 | SC6.6-PA66HIRHSUV-BK

## Description

---

The C Clip with fir tree mount is ideal for panels with pre-drilled holes. Easy installation by hand eliminates the need for any tools.

Once installed, the cable simply snaps into the clip. The cable can be removed and reinstalled without removing the clip.

Made from PA66HIRHSUV material, the clip offers increased flexibility along with heat resistance and UV stability.

### Specifications

CE Certification No

ELV compliant Dir. Art. 4 (2) YES

Flammability UL 94 HB

Halogenfree Yes

Hazardous good No

Operating Temperature - °C -40 °C to +105 °C, (+105 °C for 500 h)

Attach to Ø 6.0 - 7.6

Bundle Ø max. 7.6mm

Bundle Ø min. 6.0mm

Disc Ø 18.55mm

For Hole Ø 6.6 mm

For Panel Thickness min - max 0.7 - 6.4 mm

Height (H) 33.43mm

Width (W) 18.26mm

Width (W2) 8.0mm

Supplied in a pack of 100.

HellermannTyton Art.-No. 151-00927 | SC6.6-PA66HIRHSUV-BK