






# Fixing Tie with Fir Tree, Disc and Stand-Off UV-Resistant Pk1000

Product Images

Product Code: R02-1952

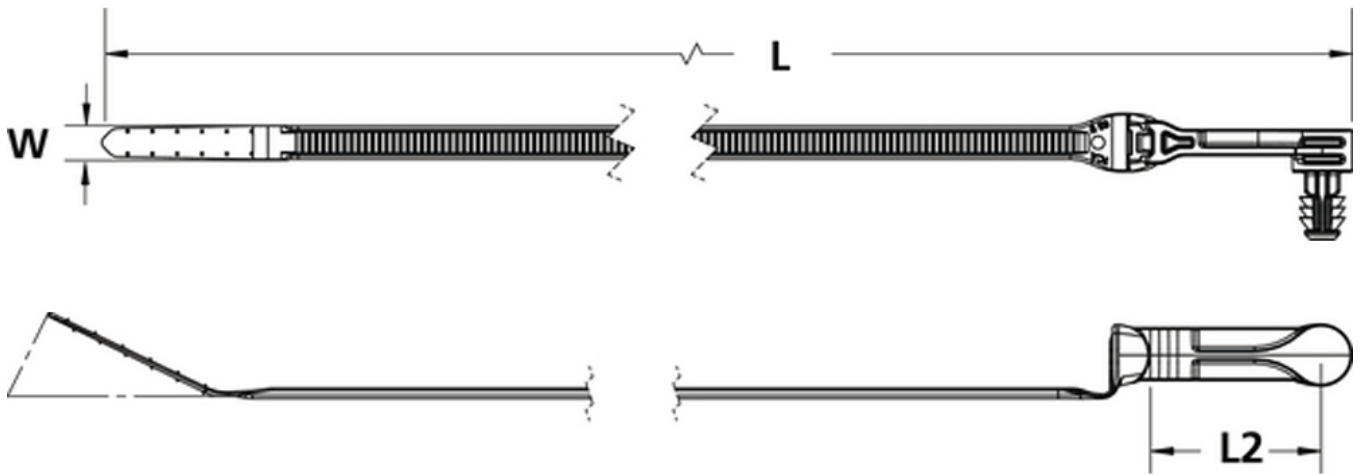

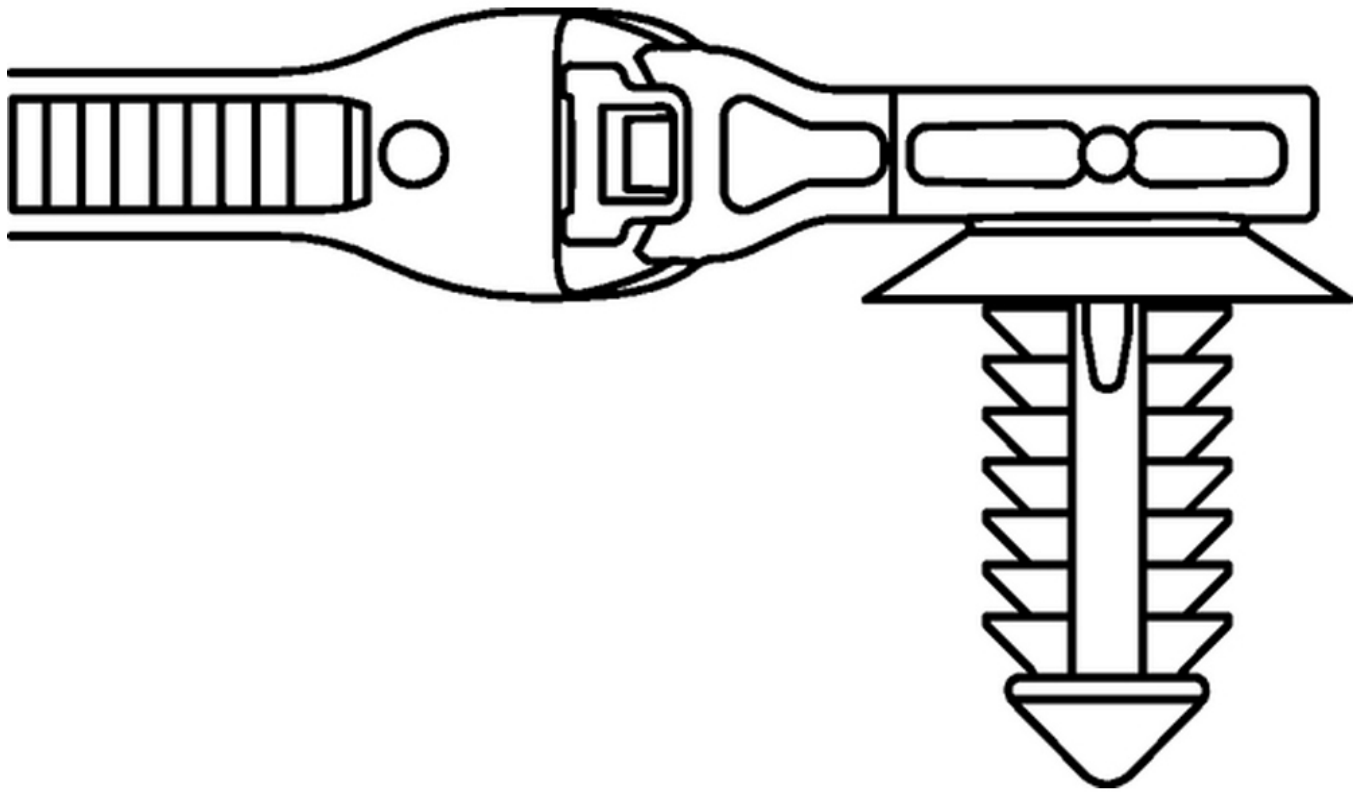

## Short Description

Bundling and fixing solution with the ideal combination of materials and design.

Material: Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV)

Variant: Outside Serrated

Bundle Ø max. 50.0mm

Bundle Ø min. 2.0mm

Diameter (D) 9.04mm

For Hole Ø 5.6 mm

For Panel Thickness min - max 3 - 4.3 mm

For Panel Thickness min - max 0.2 - 0.2 "

2

Height (H) 10.3mm  
Height (H2) 19.25mm  
Length (L) 203.2mm  
Length (L2) 25.0mm  
Min.Tensile Strength 225.0N  
Offset Length 25.0mm  
Panel Thickness max. 3.0 - 4.25mm  
Width (W) 5.08mm  
Width (W2) 6.6mm

ELV compliant Dir. Art. 4 (2) YES  
Flammability UL 94 HB  
Halogenfree Yes  
Operating Temperature - °C -40 °C to +105 °C, (+105 °C for 500 h)  
Plenum Rating AH-2

Supplied in a pack of 1000

HellermannTyton Art.-No. 157-00421 | T50ROSFT5.6SO25R-PA66HIRHSUV-BK

## Description

---

Bundling and fixing solution with the ideal combination of materials and design.

Material: Polyamide 6.6, high impact modified, heat and UV-stabilised (PA66HIRHSUV)

Variant: Outside Serrated

Bundle Ø max. 50.0mm  
Bundle Ø min. 2.0mm  
Diameter (D) 9.04mm  
For Hole Ø 5.6 mm  
For Panel Thickness min - max 3 - 4.3 mm  
For Panel Thickness min - max 0.2 - 0.2 "  
Height (H) 10.3mm  
Height (H2) 19.25mm  
Length (L) 203.2mm  
Length (L2) 25.0mm  
Min.Tensile Strength 225.0N  
Offset Length 25.0mm  
Panel Thickness max. 3.0 - 4.25mm  
Width (W) 5.08mm  
Width (W2) 6.6mm

ELV compliant Dir. Art. 4 (2) YES  
Flammability UL 94 HB

Halogenfree Yes

Operating Temperature - °C -40 °C to +105 °C, (+105 °C for 500 h)

Plenum Rating AH-2

Supplied in a pack of 1000

HellermannTyton Art.-No. 157-00421 | T50ROSFT5.6SO25R-PA66HIRHSUV-BK