


HellermannTyton Cable Tie 200 x 4.6mm UV-Resistant Black Pk100

Product Images

Product Code: R02-1951

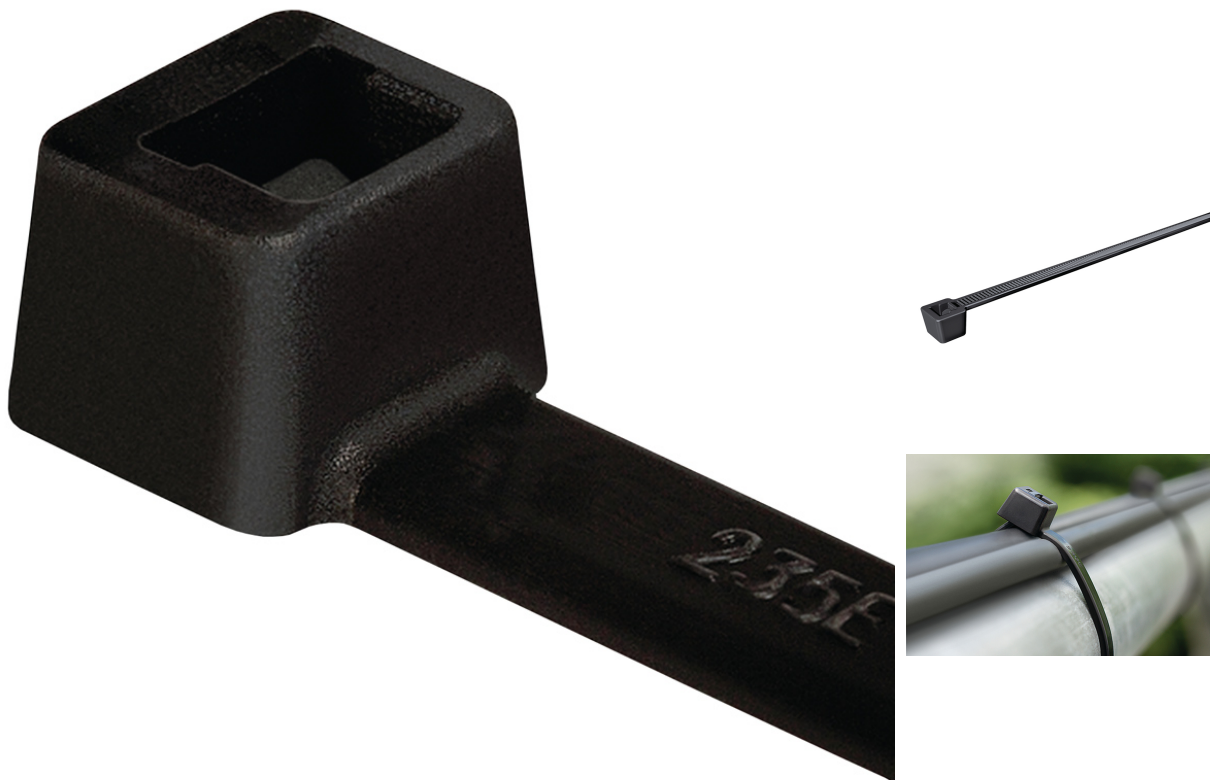

Short Description

UV Resistant (PA66W/UV) cable ties used for routing, bundling and securing of cables, pipes and hoses.

Features

High tensile strength with very low insertion force
Only high quality plastic is used meeting recycling targets
Inside serrated cable ties for a strong hold onto bundles
Ergonomic bent tail offers quick and simple installation
Easy application either manually or with an application tool

Material Polyamide 6.6, UV-resistant (PA66W)
Variant Inside Serrated

Specifications

ELV compliant Dir. Art. 4 (2) YES
Flammability UL 94 V2
Halogenfree Yes
Operating Temperature - °C -40 °C to +85 °C, (+105 °C, 500 h)

Supplied in a pack of 100

HellermannTyton Art.-No. 111-04889 | T50R-PA66W-BK

Description

UV Resistant (PA66W/UV) cable ties used for routing, bundling and securing of cables, pipes and hoses.

Features

High tensile strength with very low insertion force
Only high quality plastic is used meeting recycling targets
Inside serrated cable ties for a strong hold onto bundles
Ergonomic bent tail offers quick and simple installation
Easy application either manually or with an application tool

Material Polyamide 6.6, UV-resistant (PA66W)
Variant Inside Serrated

Specifications

ELV compliant Dir. Art. 4 (2) YES
Flammability UL 94 V2
Halogen free Yes
Operating Temperature - °C -40 °C to +85 °C, (+105 °C, 500 h)

Supplied in a pack of 100

HellermannTyton Art.-No. 111-04889 | T50R-PA66W-BK