


Mills Limited Unit 2, Zodiac Business Park, High Road, Cowley Uxbridge UB8 2GU Contact us on: Tel: 020 8833 2626 Fax: 020 8833 2600 Email: sales@millsltd.com


Company No. 00282704 VAT No. 227082574

Easi-Dec Board-Walk 1m Section

Product Images

Product Code: S00-0815

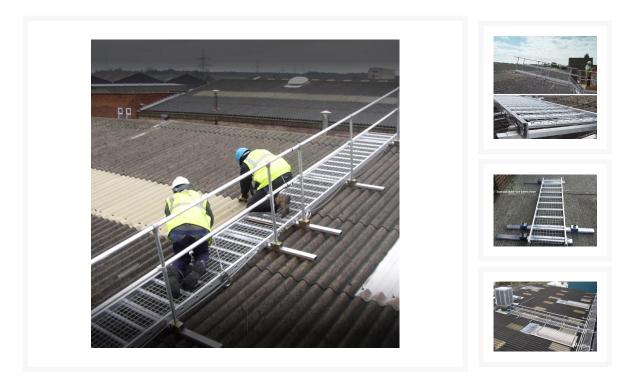

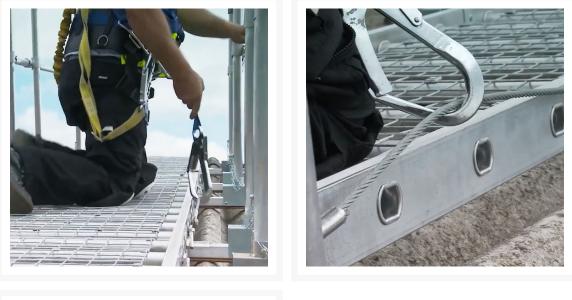



Short Description

The Easi-Dec Board-Walk is a roof maintenance and repair platform designed to allow access to the roof from eaves to ridge, while spreading the load on support battens. It is suitable for fragile roofs.

Board-Walk is configurable to suit your requirements with a choice of 1m, 2m, 3m or 4m lengths. Add accessories to ensure that the system is fit for the exact job in hand. Handrail options are also available for added safety.

Board-Walk has been designed to be put together by a single person, quickly. The system is easy to assemble, use and disassemble.

The Board-Walk is thoroughly tried and tested to ensure that you remain safe while working on a roof.

Specifications

- Walkway width: 600m
- Material: 6082T6 high grade aluminium
- Suitable for an incline of up to 30 degrees

The Easi-Dec Board-Walk complies with the following standards:

- EN12811-1
- EN 795: 2012.

Description

The Easi-Dec Board-Walk is a roof maintenance and repair platform designed to allow access to the roof from eaves to ridge, while spreading the load on support battens. It is suitable for fragile roofs.

Board-Walk is configurable to suit your requirements with a choice of 1m, 2m, 3m or 4m lengths. Add accessories to ensure that the system is fit for the exact job in hand. Handrail options are also available for added safety.

Board-Walk has been designed to be put together by a single person, quickly. The system is easy to assemble, use and disassemble.

The Board-Walk is thoroughly tried and tested to ensure that you remain safe while working on a roof.

Specifications

Walkway width: 600m Material: 6082T6 high grade aluminium Suitable for an incline of up to 30 degrees

The Easi-Dec Board-Walk complies with the following standards:

EN12811-1 EN 795: 2012.

Dimensions: 1000mm x 620mm x 80mm

Easi-Dec ref ED040163A