


SC-SC Singlemode Duplex Patch Cord OS2 9/125 5m

Product Images

Product Code: T70-2300

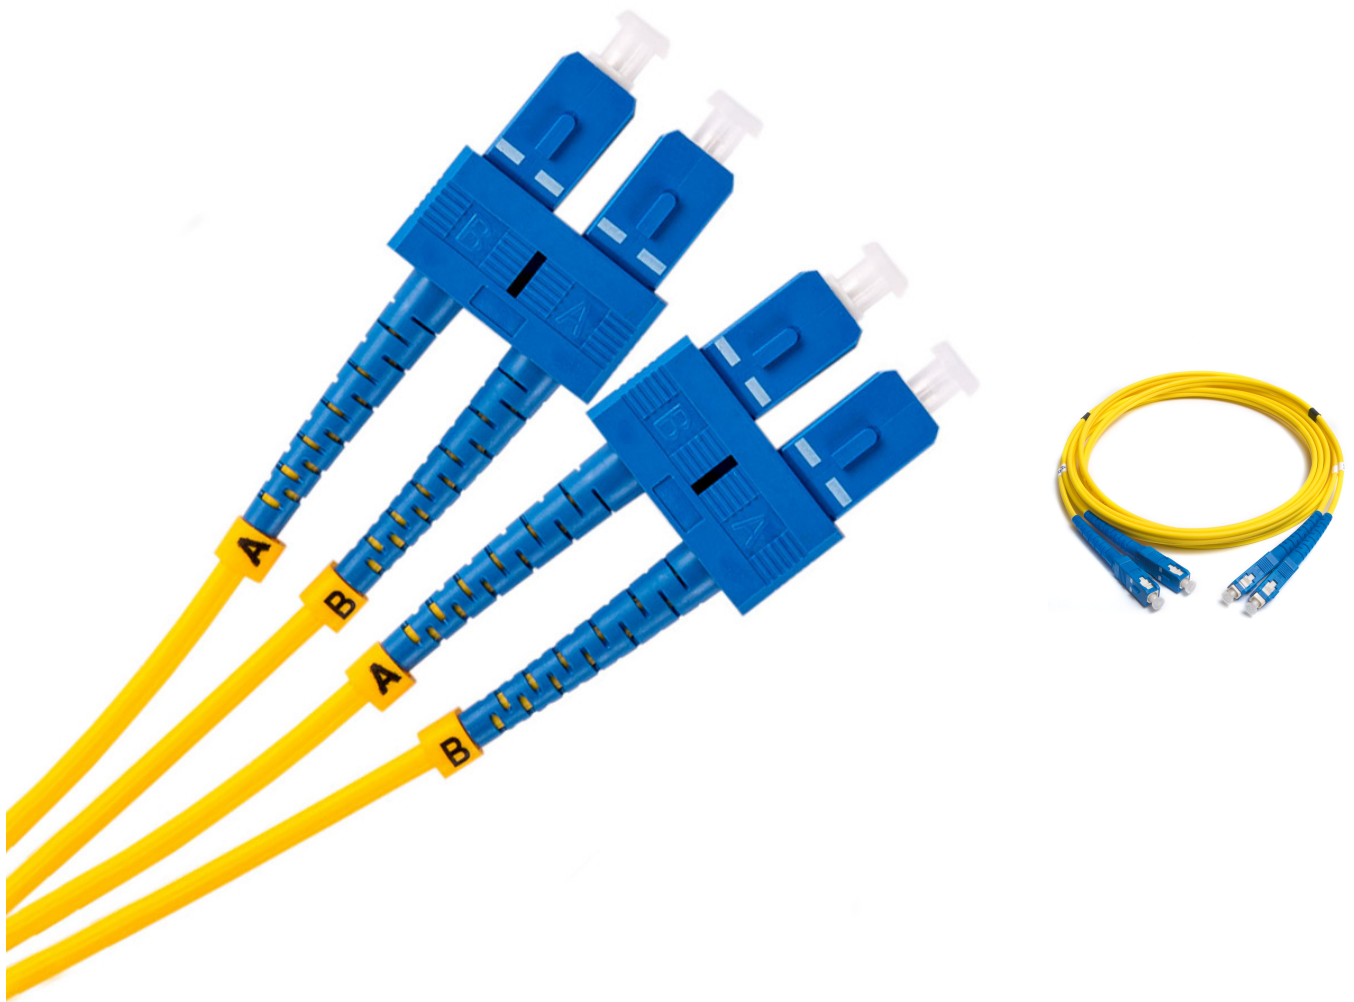

Short Description

Duplex singlemode patch cord terminated with SC connectors.

Description

OS2 singlemode fibre optic patch cords are used to connect longer distance networks, between buildings and campuses and in long-distance metropolitan and access telecoms and CATV networks.

All assemblies are fully tested prior to delivery and supplied with test result.

OS2 singlemode patch cords are supplied using 3mm (for additional ruggedising) cable with a yellow LSZH cable jacket as standard.

Applications

- Data Centres
- LAN/Enterprise
- Metropolitan and access networks
- FTTH
- CATV
- Transmission, switch and test equipment

Features

- LSZH - Low smoke zero halogen, yellow jacket
- 900µm tight buffer, 3mm simplex and duplex cable
- Supplied with UPC polished connector end face as standard
- OS2 fibre conforms to or exceeds all relevant ISO/IEC, TIA/EIA and ITU standards

Fibre Specification

Attenuation (db / km) ≤ 0.32 @ 1310nm / ≤ 0.18 @ 1550nm

Chromatic Dispersion (ps/nm=km) 1285 - 1340 ≥ -3.4 ≤ 3.4 1550nm ≤ 181 625nm ≤ 22 Zero

Dispersion Wavelength (nm) 1312 ± 22

Cable Specification

Cable Material LSZH

Strength Member Aramid

Crush (N/100mm) 1000

Tensile (N) 120

Operating temperature (°C) -20 to 60

Connector Specification

IL Max/Master (db) (Acceptance) ≤ 0.25

Av./Random (db) ≤ 0.20

Return Loss ≥ 55

Colour: Yellow

Length: 5m