

Mills Limited
Unit 2,
Zodiac Business Park,
High Road,
Cowley
Uxbridge

UB8 2GU


Contact us on: Tel: 020 8833 2626

Fax: 020 8833 2600 Email: sales@millsltd.com

Company No. 00282704 VAT No. 227082574

## Atlantic Hydraulic Oil AW32 20ltr

Product Images Product Code: R99-5093

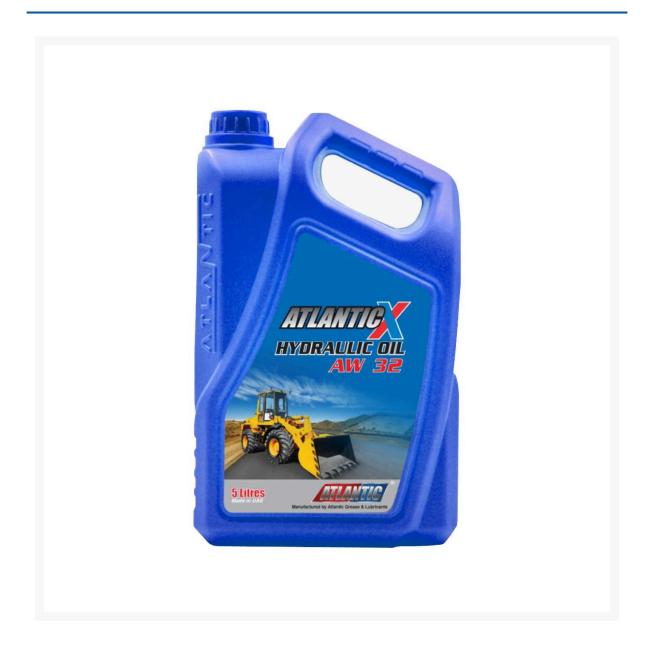

## **Short Description**

ATLANTIC HYDRAULIC OILS AW are supreme performance anti-wear hydraulic oils designed to satisfy a wide range of hydraulic equipment requirements. They were developed to meet the stringent requirements of severe hydraulic systems using high pressure, high output pumps as well as handling the critical requirements of other hydraulic system components such as close clearance servo-valves and the high accuracy numerically controlled (NC) machine tools. Formulated with high quality base oils and a super'-stabilized additive system that neutralizes the formation of corrosive materials & designed to work with systems operating under severe conditions where high levels of antiwear and film strength protection are needed, yet they are formulated to work where non'-antiwear hydraulic oils are generally recommended.

## **Description**

ATLANTIC HYDRAULIC OILS AW are supreme performance anti-wear hydraulic oils designed to satisfy a wide range of hydraulic equipment requirements. They were developed to meet the stringent requirements of severe hydraulic systems using high pressure, high output pumps as well as handling the critical requirements of other hydraulic system components such as close clearance servo-valves and the high accuracy numerically controlled (NC) machine tools. Formulated with high quality base oils and a super'-stabilized additive system that neutralizes the formation of corrosive materials & designed to work with systems operating under severe conditions where high levels of antiwear and film strength protection are needed, yet they are formulated to work where non'-antiwear hydraulic oils are generally recommended.

## Benefits:

- High protection against wear insuring maximum equipment life.
- Excellent hydrolytic stability avoiding filter blocking.
- Excellent protection against rust and corrosion.
- Superior thermal stability avoiding formation of sludge even at high temperature.
- Good anti'-foam and air release properties by using silicon free components.
- Very good oxidation stability ensuring a long service life of the fluid
- Reduced maintenance and operating costs
- Good demulsibility ensuring rapid water separation
- Quality reserve maintains performance features even under severe service conditions and extended drain intervals
- Remarkable filterability even in the presence of water