

Mills Limited
Unit 2,
Zodiac Business Park,
High Road,
Cowley
Uxbridge

UB8 2GU


Contact us on: Tel: 020 8833 2626

Fax: 020 8833 2600 Email: sales@millsltd.com

Company No. 00282704 VAT No. 227082574

Eyebolt Expanding 1A Pk 20

Product Images Product Code: S83-1853

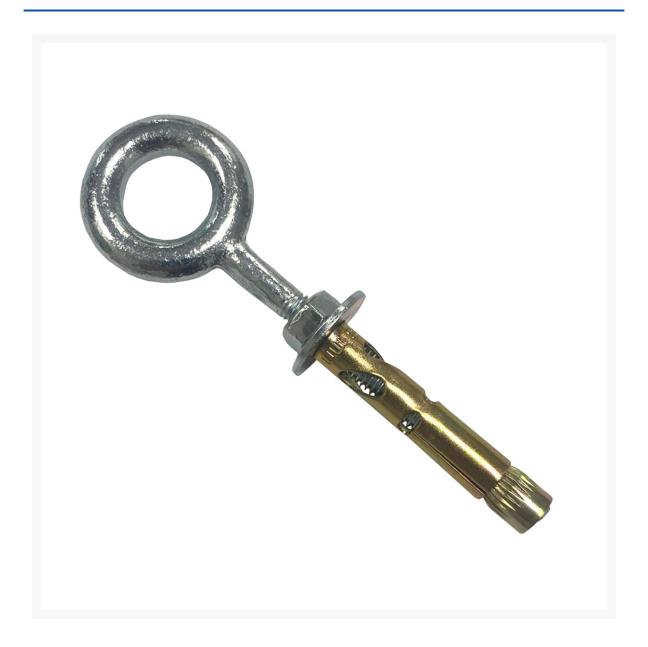

Short Description

Overhead single point fixing bolt.

The eyebolt is suitable for fitting to brick or concrete construction and has a rated minimum Safe Working Load of 2kN with a safety factor of 3:1 when the load is applied along the axis of the bolt, and at all angles up to 45 degrees to the axis of the bolt.

Ring size 15mm internal, 30mm external.

Required hole size 8mm x 50mm deep.

Recommended SDS drill N36-1127 8mm x 160mm Long

Overall Length overall: 92mm

These fixings are electric galvanised to (BS1706 (1990) or ISO4520)

Zinc coating: 8 micron minimum

The fixings are expected to provide corrosion resistance for a minimum 25 years

(This cannot be guaranteed and is subject to UK location)

Supplied in box of 20

Formerly S83-2777

Ref: 016445

Description

Overhead single point fixing bolt.

The eyebolt is suitable for fitting to brick or concrete construction and has a rated minimum Safe Working Load of 2kN with a safety factor of 3:1 when the load is applied along the axis of the bolt, and at all angles up to 45 degrees to the axis of the bolt.

Ring size 15mm internal, 30mm external.

Required hole size 8mm x 50mm deep.

Recommended SDS drill N36-1127 8mm x 160mm Long

Overall Length overall: 92mm

These fixings are electric galvanised to (BS1706 (1990) or ISO4520)

Zinc coating: 8 micron minimum

The fixings are expected to provide corrosion resistance for a minimum 25 years (This cannot be guaranteed and is subject to UK location)

Supplied in box of 20

Formerly S83-2777

Ref: 016445