


Mills Stainless Steel Cable Tie

300mm x 4.6mm Pk 100

Product Images

Product Code: S00-4686

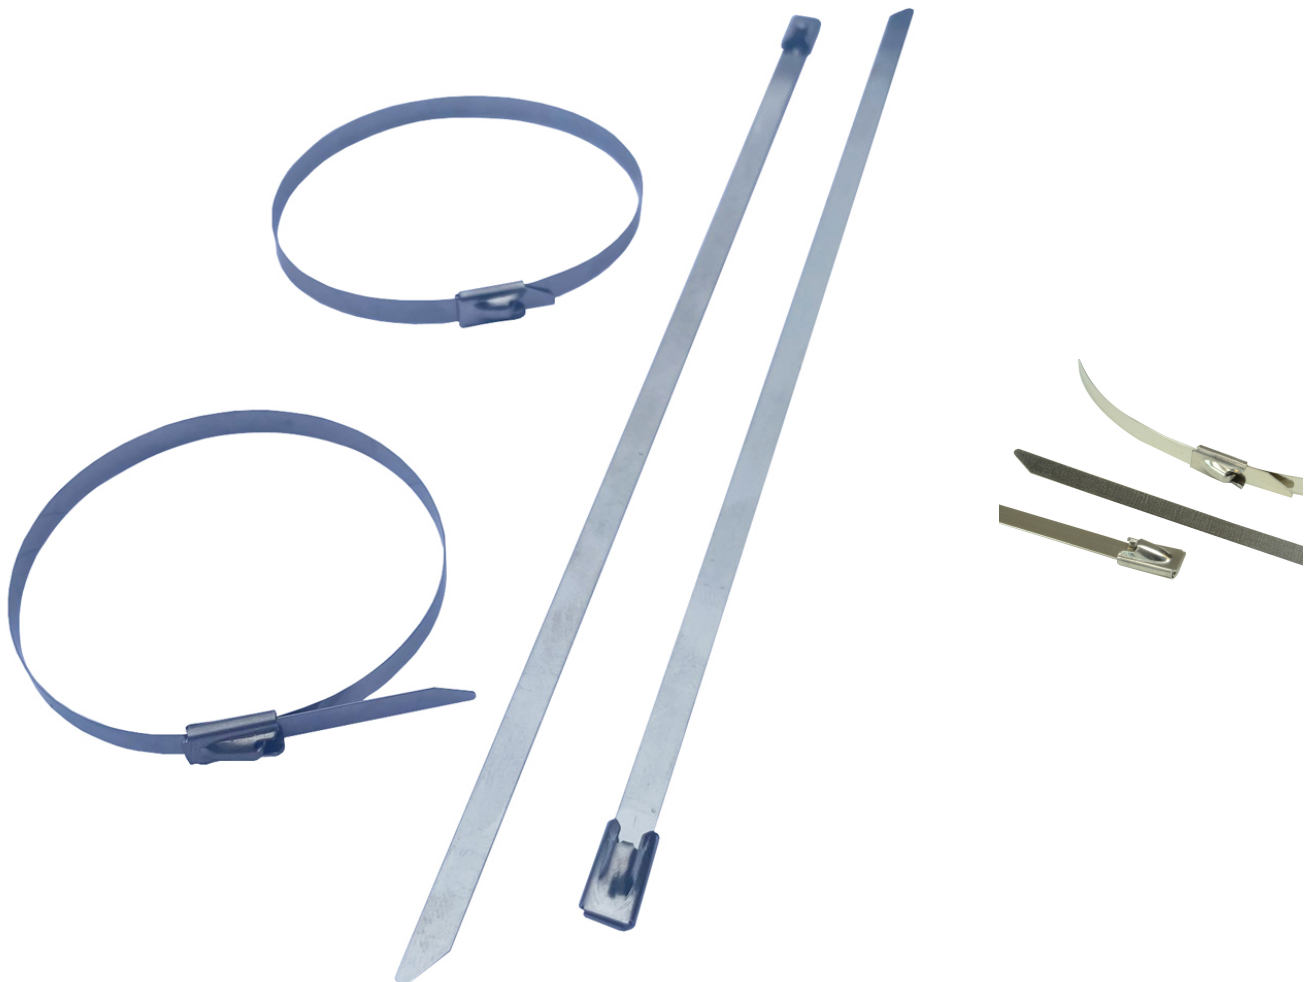

Short Description

Mills Stainless Steel Cable Ties 300mm x 4.6mm supplied in a pack of 100

Stainless steel cable ties are ideal for all applications that require high strength, reliability and fire resistance.

In the event of a fire, cables will remain securely held in place and will not fall to block emergency exits. These ties have a locking feature and offer infinite adjustment within their length. The ties are heavy duty and once installed they can be opened and re-used if required.

It is strongly recommended that these cable ties are applied using the S57-4257 Cable Tie Gun for Stainless Steel Ties or S00-5631 Tensioning Tool to ensure reliable and efficient fixing.

- Corrosion resistant
- Outstanding chemical resistance
- High temperature resistance
- Non-burning

Operating Temperature -80 °C to +538 °C

Bundle Ø max. 50.0mm

Bundle Ø min. 15.0mm

Min.Tensile Strength 670.0N

Length (L) 201.0mm

Thickness (T) 0.3mm

Width (W) 4.6mm

Operating Temperature -80 °C to +538 °C

Bundle Ø max. 76.0mm

Bundle Ø min. 17.0mm

Min.Tensile Strength 2000.0N

Length (L) 300.0mm

Thickness (T) 0.3mm

Width (W) 4.6mm

Formerly S00-5622

Description

Mills Stainless Steel Cable Ties 300mm x 4.6mm supplied in a pack of 100

Stainless steel cable ties are ideal for all applications that require high strength, reliability and fire resistance.

In the event of a fire, cables will remain securely held in place and will not fall to block emergency exits. These ties have a locking feature and offer infinite adjustment within their length. The ties are heavy duty and once installed they can be opened and re-used if required.

It is strongly recommended that these cable ties are applied using the S57-4257 Cable Tie Gun for Stainless Steel Ties or S00-5631 Tensioning Tool to ensure reliable and efficient fixing.

- Corrosion resistant
- Outstanding chemical resistance
- High temperature resistance

2 Non-burning

Operating Temperature -80 °C to +538 °C

Bundle Ø max. 50.0mm

Bundle Ø min. 15.0mm

Min.Tensile Strength 670.0N

Length (L) 201.0mm

Thickness (T) 0.3mm

Width (W) 4.6mm

Operating Temperature -80 °C to +538 °C

Bundle Ø max. 76.0mm

Bundle Ø min. 17.0mm

Min.Tensile Strength 2000.0N

Length (L) 300.0mm

Thickness (T) 0.3mm

Width (W) 4.6mm

Formerly S00-5622