

Mills Limited Unit 2, Zodiac Business Park, High Road, Cowley Uxbridge

UB8 2GU


Contact us on: Tel: 020 8833 2626 Fax: 020 8833 2600 Email: sales@millsltd.com Company No. 00282704 VAT No. 227082574

## Mills External Fibre Locking Mechanism for Ultra-Lightweight Overhead Cables

Product Images Product Code: S00-7197





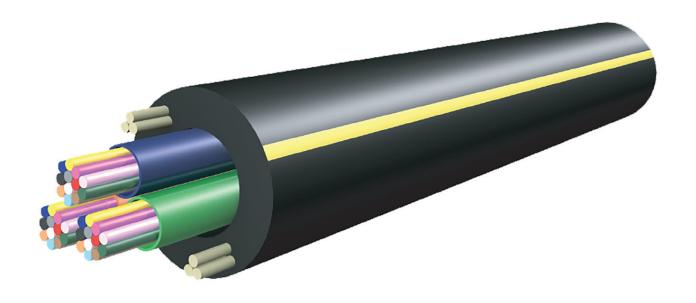

## **Short Description**

The Fibre Locking Mechanism anti-creep device, is a locking mechanism essential for 'loose' jacketed element or elements in an overhead cable.

The FLM or ELM as it is sometimes known, provides an effective solution that isolates the termination of the fibres, either spliced or connectorised, in the fibre enclosure from the 'in span' environmental loading (ice and winding).

Attached to a wooden pole with 4 No.8 x 1 inch Countersunk Pozi Wood Screws (supplied), or on hollow poles using S83-1542 Banding Stainless Steel 20mm x 50m

A number of ELMs can be fitted on a pole in line.

Designed to form a 'bridge' over other cables fitted to a pole.

Ref: 066611

## **Description**

element or elements in an overhead cable.

The FLM or ELM as it is sometimes known, provides an effective solution that isolates the termination of the fibres, either spliced or connectorised, in the fibre enclosure from the 'in span' environmental loading (ice and winding).

Attached to a wooden pole with 4 No.8 x 1 inch Countersunk Pozi Wood Screws (supplied), or on hollow poles using S83-1542 Banding Stainless Steel  $20mm \times 50m$ 

A number of ELMs can be fitted on a pole in line.

Designed to form a 'bridge' over other cables fitted to a pole.

Ref: 066611