


LastMile 70/10 Blown Fibre Air Compressor - Petrol

Product Images

Product Code: S00-3790

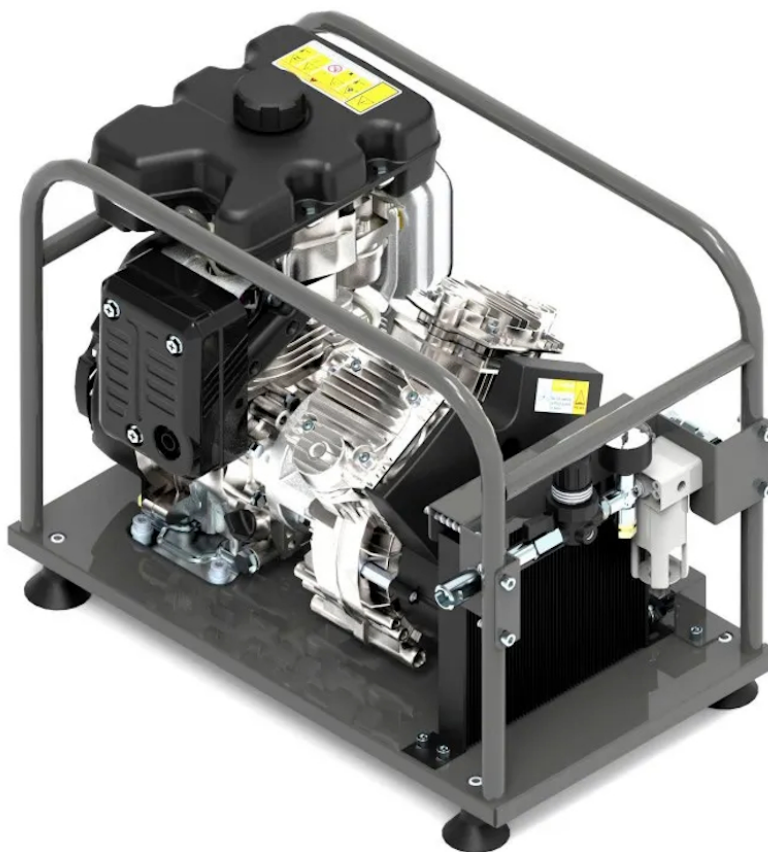

Short Description

This compact and lightweight compressor has been specifically designed to produce clean oil free dry air

for fibre blowing applications and is the ideal partner for the NANOFLOW Fremco Nanoflow or F19-1000 FTTH Innovations F.I.G.Fibre Installation Gun.

The compressor has an efficient V twin oil-less compressor pump powered by a 3HP Subaru petrol motor which produces 9.5 CFM (270 l/min) of clean air at maximum pressure of 10 Bar (145 PSI),

- V - Configuration oil-less compressor pump
- Oil free air production
- Tankless design
- Cast aluminium construction
- Unique connecting rod system for perfect balance
- Heat-treated components for longer life
- Stainless steel valves
- Air cooling radiator with pressure stabilising valve
- Condensate filter
- Auto discharge idling valve
- Heavy-duty flexible reinforced delivery pipe
- Full wrap around frame for protection and portability
- Supplied with 'Instantair' coupler

Engine 3 HP / 3000 rpm SUBARU Petrol

Air Flow Rate 9.5 CFM (270 ltr/min)

Maximum Pressure 145 psi (10 bar)

Noise Level 80 dB LpA / 94 dB LwA

Fuel Tank Capacity 3.5 Litre

Weight 25 kg

Description

This compact and lightweight compressor has been specifically designed to produce clean oil free dry air for fibre blowing applications and is the ideal partner for the NANOFLOW Fremco Nanoflow or F19-1000 FTTH Innovations F.I.G.Fibre Installation Gun.

The compressor has an efficient V twin oil-less compressor pump powered by a 3HP Suburu petrol motor which produces 9.5 CFM (270 l/min) of clean air at maximum pressure of 10 Bar (145 PSI),

- V - Configuration oil-less compressor pump
- Oil free air production
- Tankless design
- Cast aluminium construction
- Unique connecting rod system for perfect balance
- Heat-treated components for longer life
- Stainless steel valves
- Air cooling radiator with pressure stabilising valve
- Condensate filter
- Auto discharge idling valve
- Heavy-duty flexible reinforced delivery pipe
- Full wrap around frame for protection and portability
- Supplied with 'Instantair' coupler

Engine 3 HP / 3000 rpm SUBARU Petrol

Air Flow Rate 9.5 CFM (270 ltr/min)

Maximum Pressure 145 psi (10 bar)

Noise Level 80 dB LpA / 94 dB LwA

Fuel Tank Capacity 3.5 Litre

Weight 25 kg