

Mills Limited
Unit 2,
Zodiac Business Park,
High Road,
Cowley
Uxbridge

UB8 2GU


Contact us on: Tel: 020 8833 2626 Fax: 020 8833 2600

Email: sales@millsltd.com

Company No. 00282704 VAT No. 227082574

# Cat6a Cable Ice Blue U/FTP LS0H Dca 305M

Product Images Product Code: T61-5467

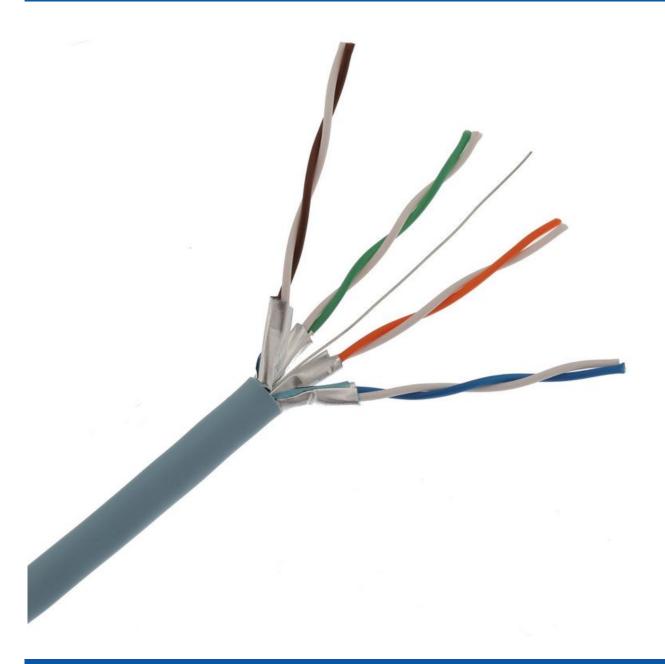

# **Short Description**

This Cat 6A U/FTP Shielded Cable offers independently verified Cat 6A component compliant performance and supports high speed protocols such as 10G Ethernet. The cable is backwards compatible to all preceding cabling categories, ensuring support of all IP applications designed to run over them . The U/FTP construction does away with the need for a plastic central separator, making the cable more flexible and easier to pull in. The individual foil shielded pairs ensure excellent NEXT performance whilst eliminating the risk of Alien crosstalk and means that a much lower twist rate can be used when compared to a U/UTP or F/UTP construction, thus making termination quicker and easier. The overall diameter of just 7.3 mm enables a tighter bend radius (just 30 mm after installation) and facilitates the installation of more cables in a given size of containment when compared to cables with an F/UTP construction. Supplied in 305m box the 305m to 1m cable metre marking makes it easy to determine precisely how much cable remains in a box.

### **Features:**

**U/FTP Construction** 

Ice Blue LSOH Sheath

7.3 mm Overall Diameter

Excellent NEXT and Alien Crosstalk Performance

Metre marked from 305m to 1m for easy assessment of remaining cable

Supplied in 305m boxes for ease and speed of installation

# **Description**

This Cat 6A U/FTP Shielded Cable offers independently verified Cat 6A component compliant performance and supports high speed protocols such as 10G Ethernet. The cable is backwards compatible to all preceding cabling categories, ensuring support of all IP applications designed to run over them . The U/FTP construction does away with the need for a plastic central separator, making the cable more flexible and easier to pull in. The individual foil shielded pairs ensure excellent NEXT performance whilst eliminating the risk of Alien crosstalk and means that a much lower twist rate can be used when compared to a U/UTP or F/UTP construction, thus making termination quicker and easier. The overall diameter of just 7.3 mm enables a tighter bend radius (just 30 mm after installation) and facilitates the installation of more cables in a given size of containment when compared to cables with an F/UTP construction. Supplied in 305m box the 305m to 1m cable metre marking makes it easy to determine precisely how much cable remains in a box.

### **Features:**

**U/FTP** Construction

Ice Blue LSOH Sheath

7.3 mm Overall Diameter

Excellent NEXT and Alien Crosstalk Performance

Metre marked from 305m to 1m for easy assessment of remaining cable

Supplied in 305m boxes for ease and speed of installation