


# HellermannTyton Fibre Wall Outlet FWOA-AXW21-010/WH

## Product Images

Product Code: FWOA-AXW21-010/WH

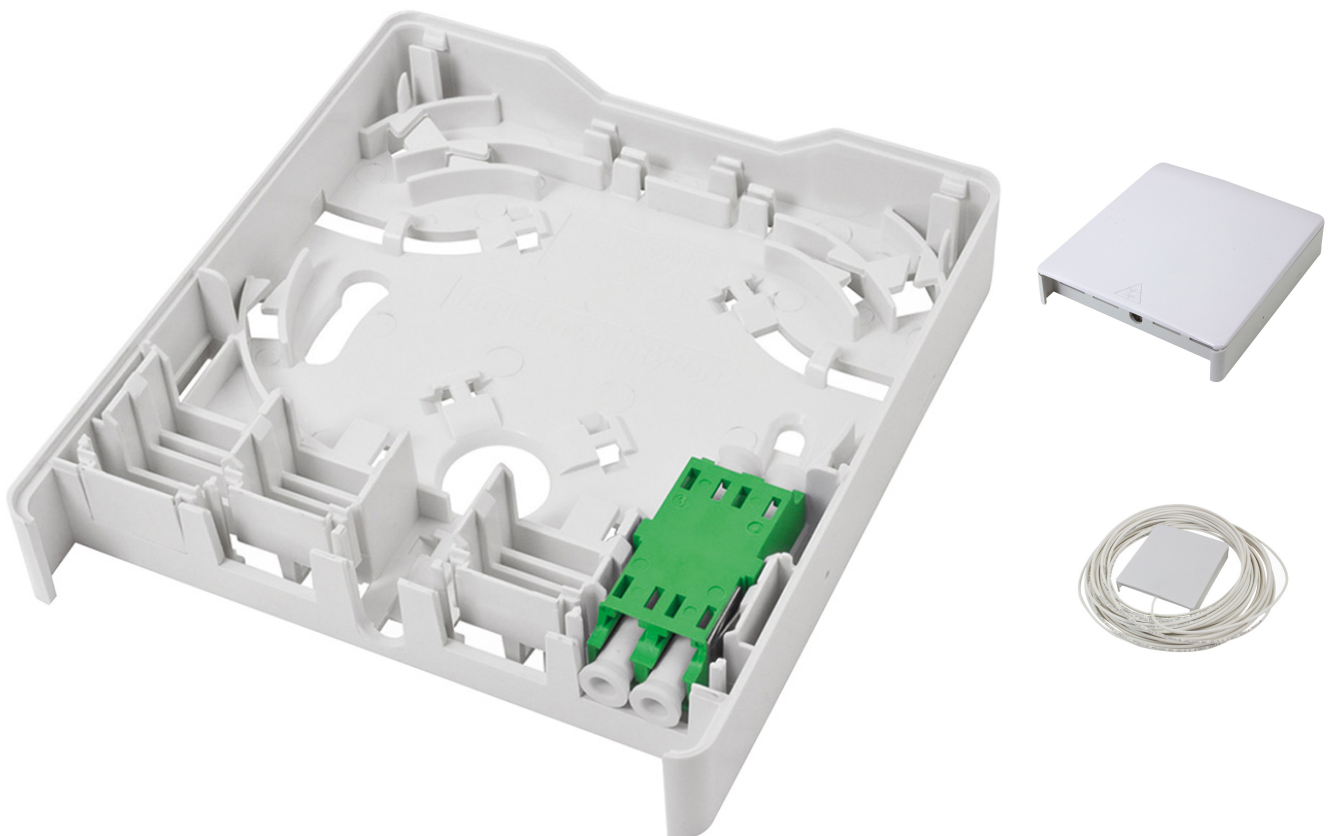

## Short Description

Wall mounted fibre optic wall outlet with a pre-terminated connection cable provides a internal connection point in the end user house or apartment. The pre-terminated cable allows the installer to

complete all splicing of fibre cable away from the customer premises.

## Description

---

The fibre wall outlet is manufactured from ABS plastic and tamper proof latches secure the cover to the base. The Pre-terminated FWO is supplied with a 2 fibre G657.A1 10m cable and is fitted with a single LC APC connector and an LC DX APC adaptor.

The pre-terminated adaptor is placed in to the wall outlet and the cable is routed through the rear of the outlet. The pre-terminated cable is available in lengths from 5m to 25m in 5m steps and from 30m to 100m in 10m steps.

The small single socket size enclosure can be discretely mounted on the wall close to the building entry point providing the connection point for a router or active equipment. Fibre management features ensure a minimum bend radius of 30mm is maintained as the bare fibre is routed through the outlet and strain relief and anchor points secure the incoming cable.

Screw holes allow for easy installation and positioning maintaining the outlet flush to the wall.

### **Features**

1 x LC DX APC Adaptor (fitted)

1 x 10m 2 fibre pre-terminated with 1 x LC APC connector to bare end cable

Cable entry through base

Install directly on the wall or onto a flush-mount back box

Accommodates upto 4 splice protectors (upto 45mm)

Quality surface finish

Tamper-proof latches

Positive fibre management to ensure a 30mm minimum bend radius

### **Application**

The wall mounted fibre optic wall outlet with a pre-terminated connection cable provides a internal connection point in the end user house or apartment. The pre-terminated cable allows the installer to complete all splicing of fibre cable away from the customer premises.

Cable Ø max: 3.0mm

Colour White (WH)

Connector Type: LC-APC

Contents: Fibre Wall Outlet 1 x LC APC Duplex Adaptor 10.0m LC APC Connector to Bare End Connection

Cable Wall Mounting Kit

Performance Category G657.A1

Splice Capacity: 2

Dimensions: Depth (D) 21mm x Height (H) 85mm x Length (L) 10.0m x Width (W) 85mm

Material: Acrylonitrile Butadiene Styrene (ABS)

Article number: 857-01378