

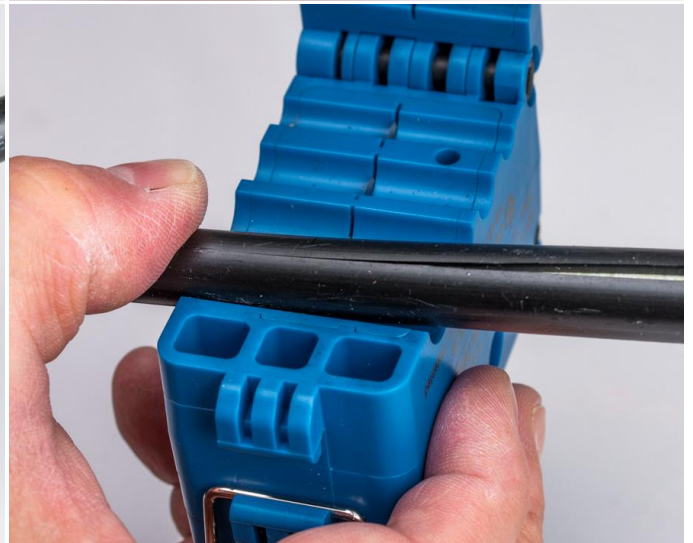
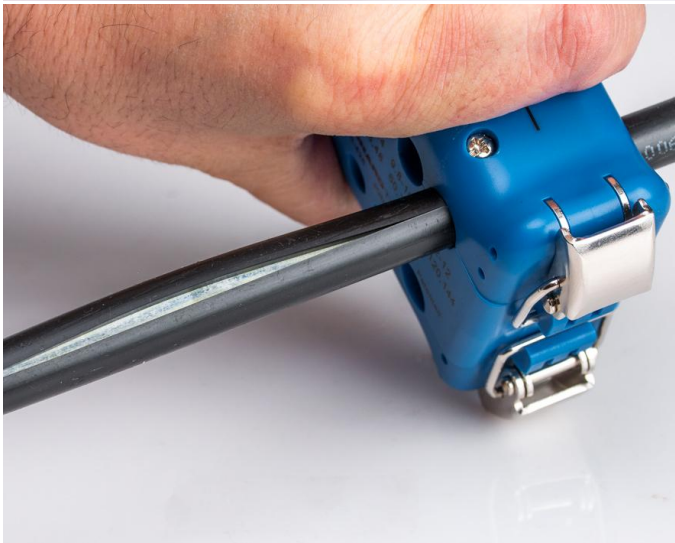



Jonard MS-426 Mid Span Slit & Ring Tool (5.8mm-12mm)

Product Images

Product Code: E00-0962

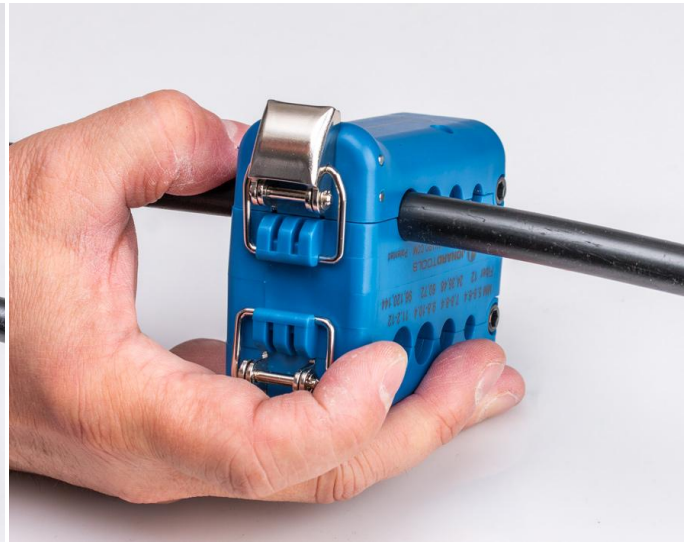

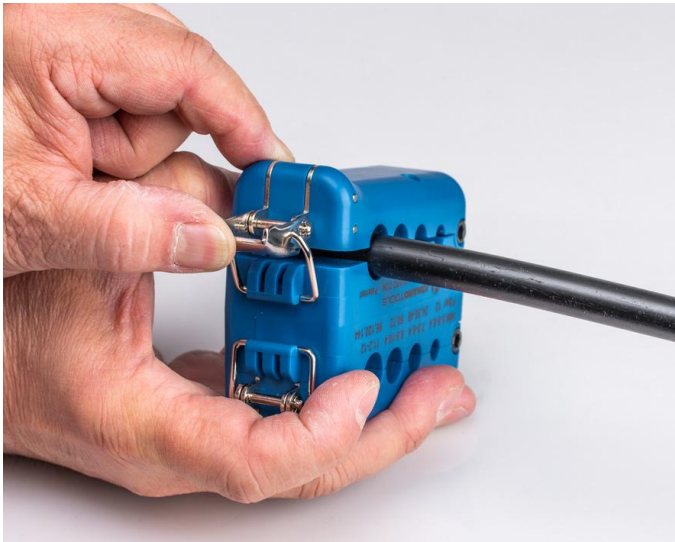

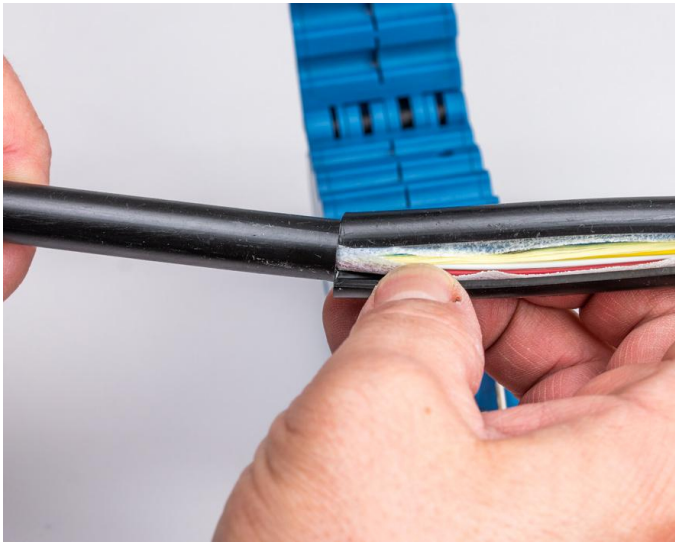

Short Description

The patented and award-winning MS-426 Mid Span Slit and Ring Tool is designed to provide easy access to optical fibres in Prysmian ESMF Optical Mini FlexTube® cables (as well as other thick-walled 5.8 to 12 mm diameter jackets).

Consists of 4 precision slitting grooves and 4 precision ring grooves ranging in size from 5.8 mm to 12 mm

One side of the tool performs radial/ring cuts and the other side slits the cable (longitudinal cut)

Compact design weighing less than 8 oz with included tethering hole makes it perfect to use in tight spaces or on the go

Indicator line on top of the unit indicates the position of the blade for accurate slitting and ringing

This tool was specially designed for use on Prysmian ESMF Optical Mini FlexTube® cables and other similar style cables

Replacement blade set available, part number: MS-426RB

Blades last for 5,000 slits/cuts

Groove Sizes: 5.8-6.4 mm | 7.8-8.4 mm | 9.8-10.4 mm | 11.2-12 mm

Description

The patented and award-winning MS-426 Mid Span Slit and Ring Tool is designed to provide easy access to optical fibres in Prysmian ESMF Optical Mini FlexTube® cables (as well as other thick-walled 5.8 to 12 mm diameter jackets).

Consists of 4 precision slitting grooves and 4 precision ring grooves ranging in size from 5.8 mm to 12

mm

One side of the tool performs radial/ring cuts and the other side slits the cable (longitudinal cut)

Compact design weighing less than 8 oz with included tethering hole makes it perfect to use in tight spaces or on the go

Indicator line on top of the unit indicates the position of the blade for accurate slitting and ringing

This tool was specially designed for use on Prysmian ESMF Optical Mini FlexTube® cables and other similar style cables

Replacement blade set available, part number: MS-426RB

Blades last for 5,000 slits/cuts

Groove Sizes: 5.8-6.4 mm | 7.8-8.4 mm | 9.8-10.4 mm | 11.2-12 mm