



Mills Limited
Unit 2,
Zodiac Business Park,
High Road,
Cowley
Uxbridge
UB8 2GU


Contact us on:
Tel: 020 8833 2626
Fax: 020 8833 2600
Email: sales@millsltd.com

Company No. 00282704
VAT No. 227082574

Polywater Prelube 5000 Cable Blowing Lubricant - 0.48 Litre

Product Images

Product Code: S83-1665

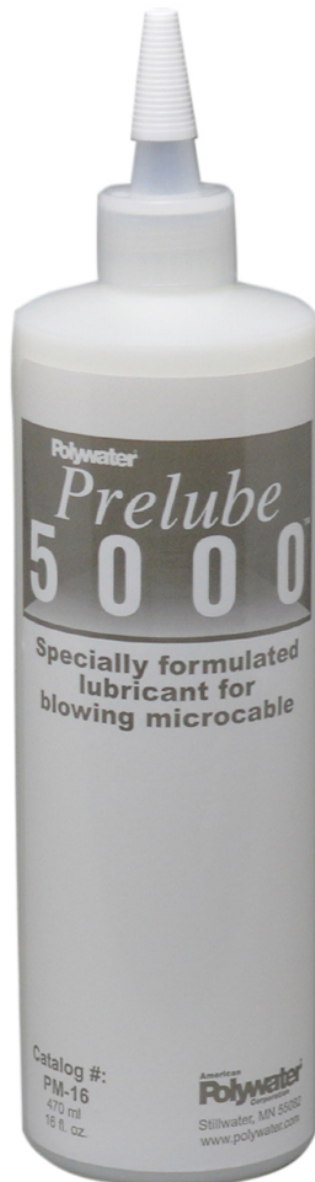

Short Description

Polywater® Prelube 5000™ is more concentrated than the Prelube 2000™. It is intended for blowing microcable into small diameter microtubes. The improved chemistry allows this product to spread further and lower friction at extremely low coating levels. The lower viscosity allows practical application into the microtubes.

- Microfibres/Microduct applications.
- Cable blowing lubricant for air assisted installations.
- Compatible with micro cable plastic jackets.
- Reduces friction, drag, and increases blowing length

Polywater® Prelube 5000™ is easy to use. It can be squeezed into the small diameter microducts. It works at extremely low coating levels. It coats further and more effectively than conventional blowing lubricants.

Polywater® Prelube 5000™ is compatible with known microcable plastic jackets. However, it should not be used for resin-coated fibre cables.

Description

Polywater® Prelube 5000™ is more concentrated than the Prelube 2000™. It is intended for blowing microcable into small diameter microtubes. The improved chemistry allows this product to spread further and lower friction at extremely low coating levels. The lower viscosity allows practical application into the microtubes.

- Microfibres/Microduct applications.
- Cable blowing lubricant for air assisted installations.
- Compatible with micro cable plastic jackets.
- Reduces friction, drag, and increases blowing length

Polywater® Prelube 5000™ is easy to use. It can be squeezed into the small diameter microducts. It works at extremely low coating levels. It coats further and more effectively than conventional blowing lubricants.

Polywater® Prelube 5000™ is compatible with known microcable plastic jackets. However, it should not be used for resin-coated fibre cables.