



Mills Limited
Unit 2,
Zodiac Business Park,
High Road,
Cowley
Uxbridge
UB8 2GU

Contact us on:
Tel: 020 8833 2626
Fax: 020 8833 2600
Email: sales@millsltd.com


Company No. 00282704
VAT No. 227082574

Polywater Zip Seal Duct Sealant Kit

Product Images

Product Code: S83-7601



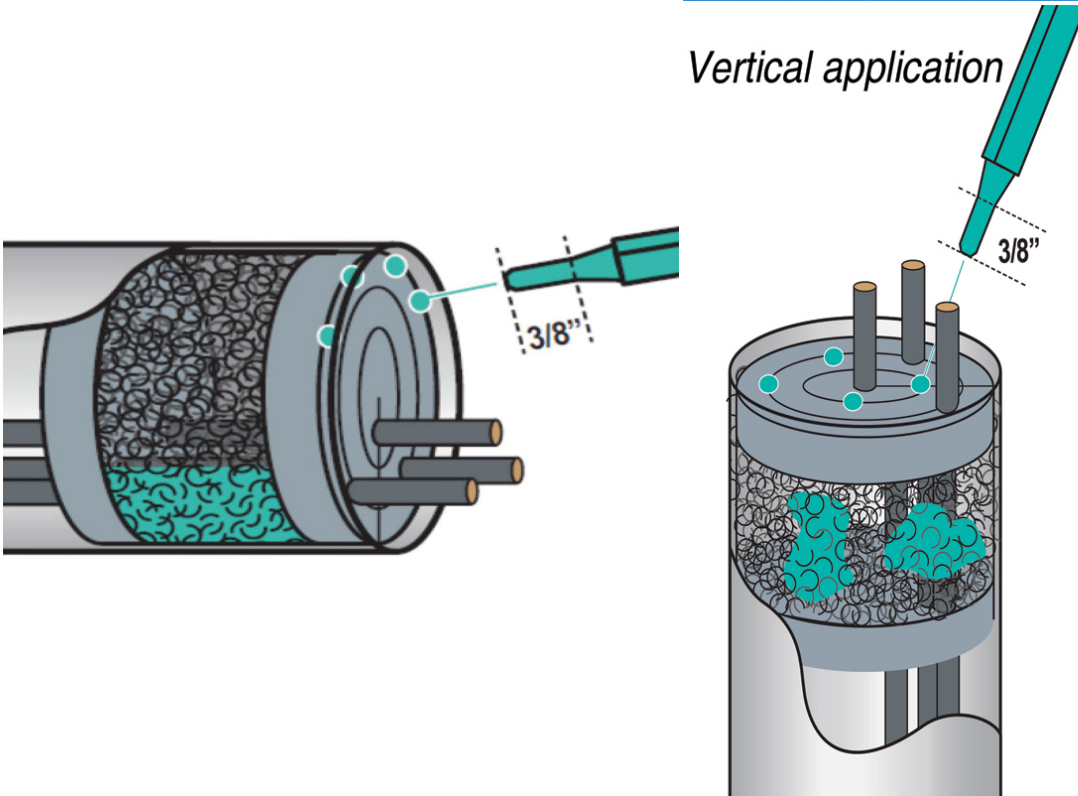

Short Description

A Closed-Cell Foam Duct Sealing System for Conduit Sizes up to 2"/50mm

ZipSeal™ Duct Sealant is a practical and efficient way to seal small conduits and communication innerducts. The revolutionary Zip-Disc™ insert traps and keeps the foaming liquid in its open-cell (center) area.

The unique two-part foam installs quickly and effectively. The innovative design of the Zip-Disc™ insert allows for horizontal and vertical installation with minimal drippage. Cured foam blocks can be removed and re-entered relatively quickly if necessary.

2

ZipSeal™ Duct Sealant holds up to 10 feet (3.0 m) water-head pressure to keep gases and rodents out of conduits

- Protects – Keeps water, gases, and rodents out of conduits.
- Quick – Installs in 45 seconds.
- Re-Enterable – Installed ZipSeal™ is easily removed.
- Multiple Seals – One kit seals up to five 2-inch/50 mm conduits.
- Meets NEC Code Requirements – 2011 NEC Articles 225.27, 230.8, 300.5 (G), 300.7 (A), on Raceway Seals, 501.15 (B)(2).
- Meets Industry Standards – Complies with TIA-758-B Standard 5.1.1.2.8, 5.4.2.3, and 7.4.2.8.1 Sealing Ducts.

ZIP-50KIT1 Contents:

1 x 50ml foam sealant cartridge with resealing cap

2 x static mixing nozzles

2 x pair disposable gloves

5 x 2" (5 cm) Zip-Disc

Requires S83-7604 Dispensing Tool (not included).

Description

A Closed-Cell Foam Duct Sealing System for Conduit Sizes up to 2"/50mm

ZipSeal™ Duct Sealant is a practical and efficient way to seal small conduits and communication innerducts. The revolutionary Zip-Disc™ insert traps and keeps the foaming liquid in its open-cell (center) area.

The unique two-part foam installs quickly and effectively. The innovative design of the Zip-Disc™ insert allows for horizontal and vertical installation with minimal drippage. Cured foam blocks can be removed and re-entered relatively quickly if necessary.

ZipSeal™ Duct Sealant holds up to 10 feet (3.0 m) water-head pressure to keep gases and rodents out of conduits

- Protects – Keeps water, gases, and rodents out of conduits.
- Quick – Installs in 45 seconds.
- Re-Enterable – Installed ZipSeal™ is easily removed.

- Multiple Seals – One kit seals up to five 2-inch/50 mm conduits.
- Meets NEC Code Requirements – 2011 NEC Articles 225.27, 230.8, 300.5 (G), 300.7 (A), on Raceway Seals, 501.15 (B)(2).
- Meets Industry Standards – Complies with TIA-758-B Standard 5.1.1.2.8, 5.4.2.3, and 7.4.2.8.1 Sealing Ducts.

ZIP-50KIT1 Contents:

1 x 50ml foam sealant cartridge with resealing cap

2 x static mixing nozzles

2 x pair disposable gloves

5 x 2" (5 cm) Zip-Disc

Requires S83-7604 Dispensing Tool (not included).