


MULTIFLOW

Cable blowing machine for optical fibers

Data Sheet

MultiFlow has many advantages

- **User friendly design**
MultiFlow has a user friendly design, which makes the machine very easy to operate. The machine is designed with main focus on functionality that makes cable blowing easy.
- **Efficient blowing**
- of micro ducts into ducts - relining.
MultiFlow is a very efficient cable blowing machine for blowing micro ducts into ducts as it is able to blow multiple micro ducts at once. The machine is able to blow many different combinations of duct and microducts.
- **Cable blowing using either air or water**
With MultiFlow it is possible to install micro ducts and fiber cables using either air or water. With water assisted cable blowing you can achieve higher pressure, which is particularly advantageous when installing multiple micro ducts at once or larger cables.
- **Robust**
MultiFlow is constructed in a way that it is robust and can withstand being used as the special conditions there sometimes are at a cable blowing location are taken into account.
- **Flexible**
MultiFlow is very flexible as it is both suited for blowing micro ducts as well as larger fiber cables. Furthermore the machine can quickly be changed to blow different sizes and numbers of micro ducts. There are many different sizes and combinations available to fit the different dimensions needed in a specific situation. Possible to stop before cable damage.

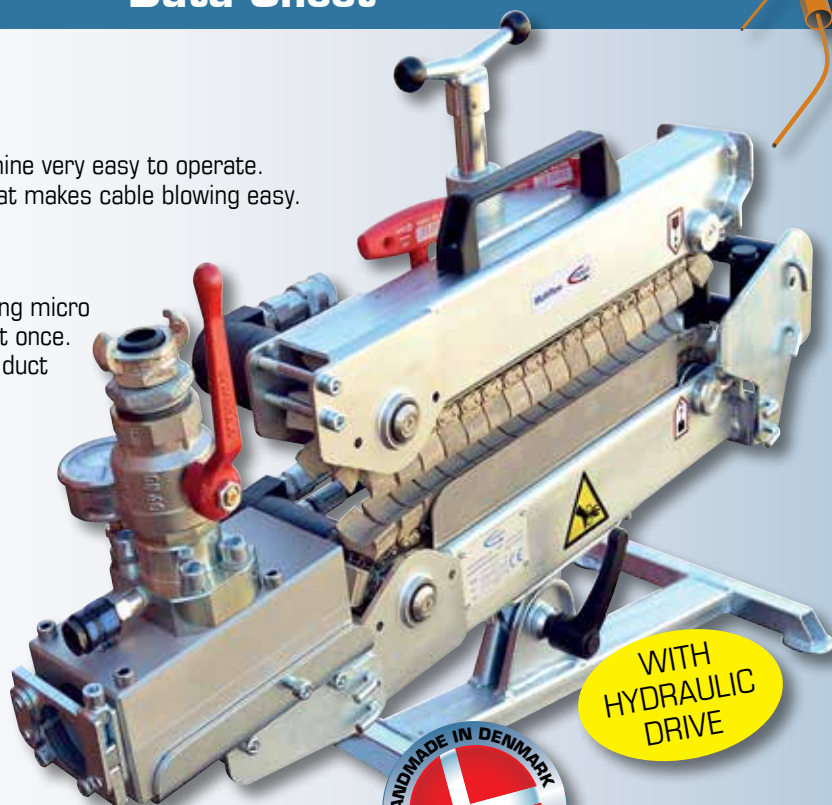

Scan the code and see a Quick presentation of the MultiFlow:



CAN BLOW WITH AIR AND OPTIONAL WITH WATER...

SPECIFICATIONS

Cable diameter:	8 - 32 mm
Duct diameter:	18 - 70 mm
Blowing distance ¹ :	Up to 10 km
Blowing speed ¹ :	Up to 80 m/min.
Recommended pressure and airflow ² :	8-12 bar (8.000-12.000 l/pr. min.)
Weight:	40 kg
Length:	700 mm
Width:	230 mm
Height:	350 mm

¹ Depending on type of microduct and cable. ² Cooled and dried air.

ATTENTION!

The following equipment are needed to run the machine:

1. Hydraulic pump + control valve.
2. High pressure compressor.
3. Hoses to both.

The PowerFlow itself are with hydraulic drive. And for blowing the cable, high pressure air must be added. We offer course all necessary accessories.

The accessory is always included in our quotations. If you already have these things, it can of course be deducted.

EXCLUSIVE distributor of Fremco products in the UK and Ireland:



Mills Ltd, 13 Fairway Drive, Greenford, UB6 8PW

Tel: +44 (0)20 8833 2626

Email: sales@millsltd.com

